



**DUCTILE IRON D SERIES
STAINLESS STEEL S SERIES
BUTTERFLY VALVES**

1½" - 12" 200 PSI Bi-Directional Service
14" - 24" 150 PSI Bi-Directional Service
Up to 48" Available



NSF/ANSI 61



NSF/ANSI 372



M. A. Stewart & Sons Ltd.

3 Year Limited Warranty


MAS-BFV-17.04




Contents



Ordering Guidelines & Trim Codes



D Series Butterfly Valves *Ductile Iron Body, Lug & Wafer Style*




S Series Butterfly Valves *Stainless Steel Body, Lug & Wafer Style*



Seat & Disc Guide *Options & Material Selection*



Chemical Compatability & Crossover Guide



Handles, Gear Operators, Lockout Devices, & Installation Guidelines



Warranty & Certifications

D & S Series Butterfly Valves Ordering Guidelines & Trim Codes

D & S SERIES Ordering Guidelines

Nominal Size	Flange Style	Body Material	Stem Material	Disc Material	Seat Material	Operator Type	Additional (if required)
4	L	D	4	DI	E	LH	
D Series Lug 1½" – 48"	L = Lug	D = Ductile Iron (Optional)	4 = 416 SS (Standard "D")	A = Aluminum Bronze	B = BUNA-N	BS = Bare Stem	U = Under Cut Disc
D Series Wafer 1½" – 48"	W = Wafer	S = CF8M (Standard)	5 = 431 SS (Standard "S")	DI = Nickel Plated Ductile Iron	E = EPDM	G = Gear Operator	LO = Lock Out
S Series 2" – 24"		C = Cast Iron	6 = 17-4PH (14" & Larger)	N = Nylon 11 Coated DI	V = FKM (Viton)	ILP = Infinite Lever Plate	
			3 = 316 SS (Optional)	S = A351 CF8M (D Series) Polished A351 CF8M (S Series)	PE = PTFE over EPDM	LH = Lever Handle	
				T = 6 mil PTFE coating over SS316	BEF = Black EPDM Food Grade		
				PS = Polished A351 CF8M (D Series)	WE = White EPDM Food Grade		
					HT = High Temp. EPDM		
					SR = Synthetic Rubber		
					SL = Silicone		
					WR = Wear Resistant EPDM		
					NP = Neoprene		


Example Above: 4" L-D-4-DI-E-LH is 4-inch Lug-Style, DI Body, 416SS Stem, Nickel-Plated DI Disc, EPDM Seat, Lever Operated.



D Series Butterfly Valves


Features & Benefits

Ductile Iron Body - Lug & Wafer Styles

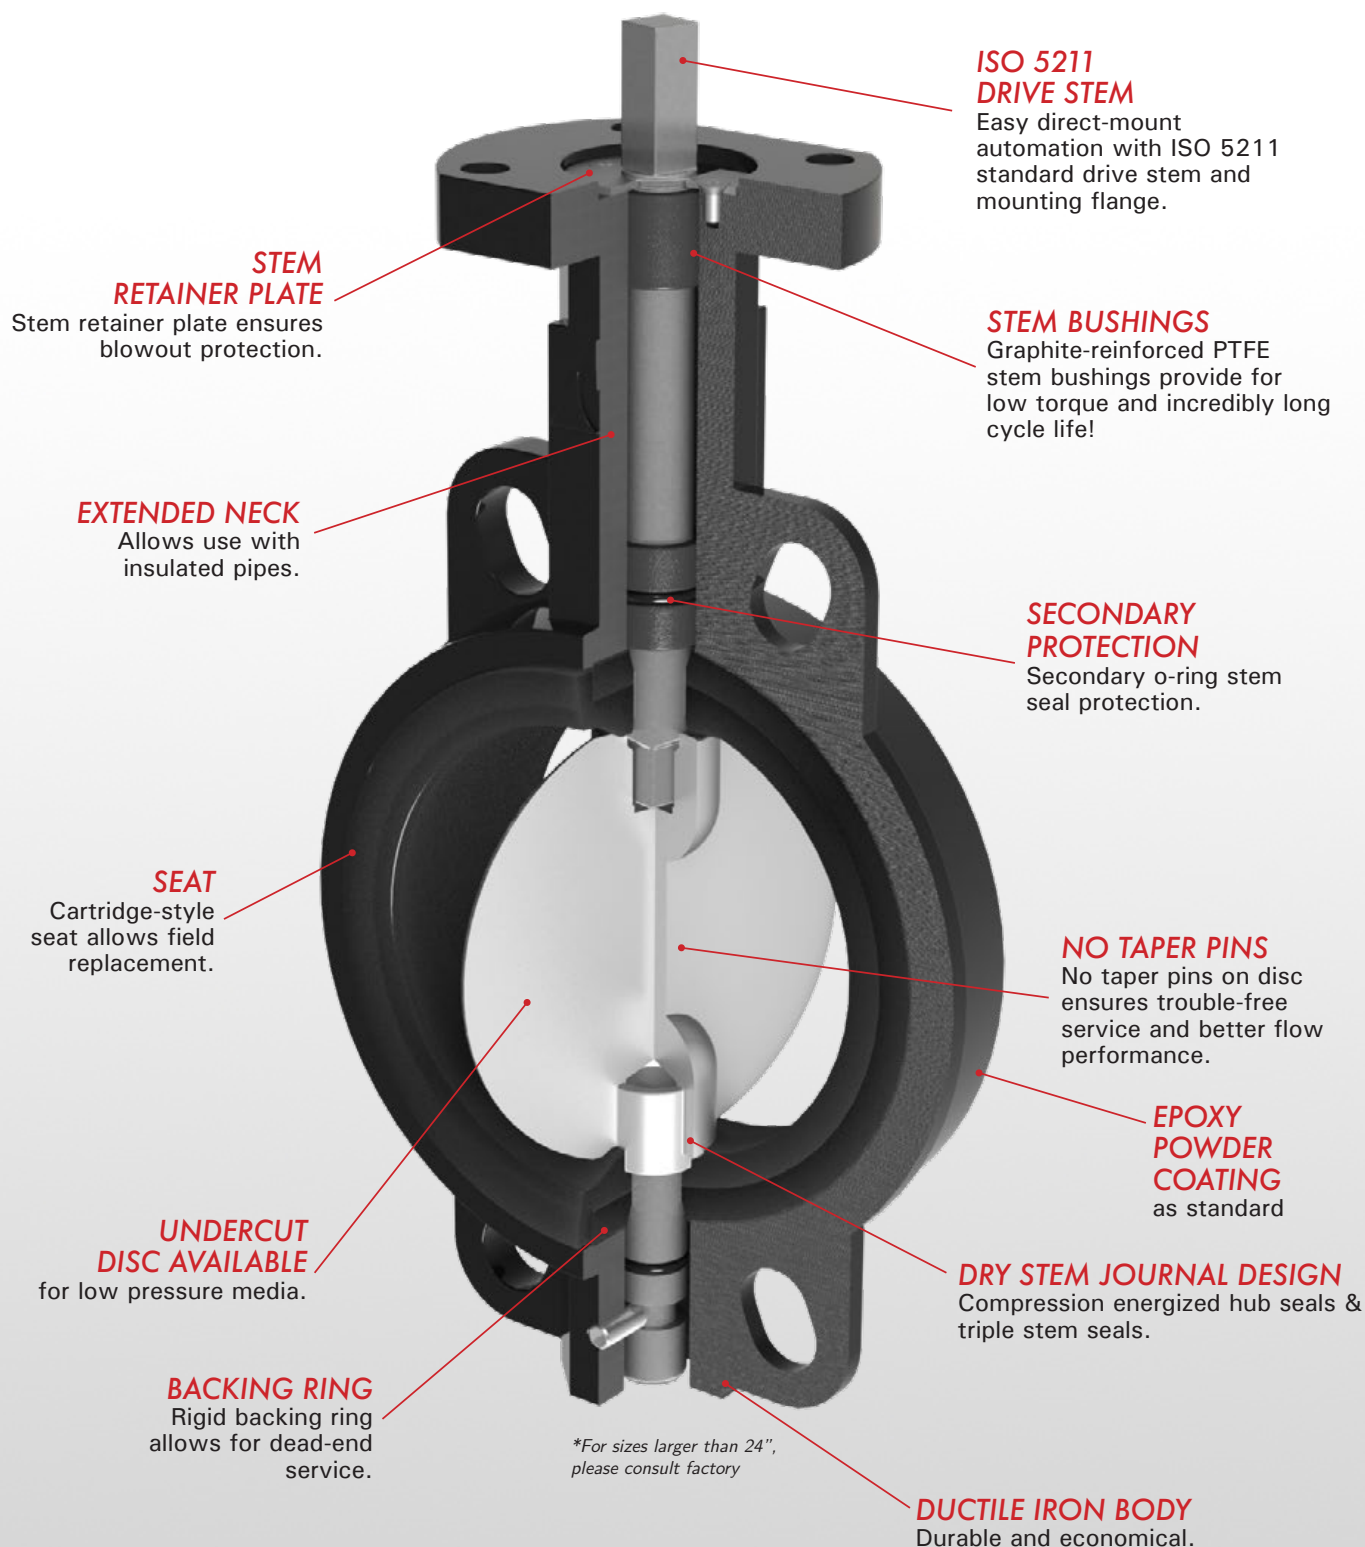




D Series Butterfly Valves

- Wafer Ductile Iron Body sizes 1.5" - 48"
- Lug Ductile Iron Body sizes 1.5" - 48"
- Lug-style dead end service capabilities through 12":
200 PSI uni-directional (Designated with flow arrow)
100 PSI bi-directional
- Install between Standard ANSI class 125/150 flanges
- Wafer also compatible with PN10/PN16 flanges
- ISO 5211 square drive shaft for easy automation
- Conforms to MSS-SP-67, MSS-SP-25, API-609
- Designed for blowout-proof service
- High-Cv slim disc & 2-piece stem design 1.5"-12"
- Field repairable
- Vacuum service capable 1.5"-12" to below 10 microns
- Malleable Iron Handles available
- Cast Iron Gear Operators available

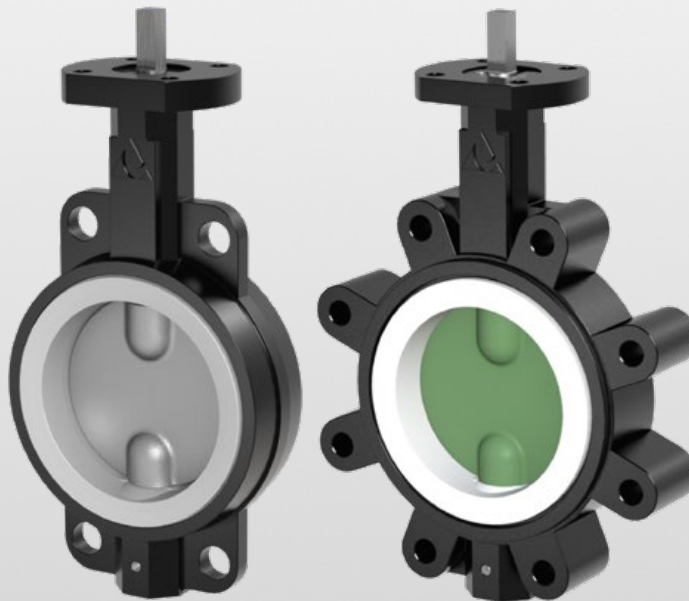

D Series Butterfly Valves

Dimensions

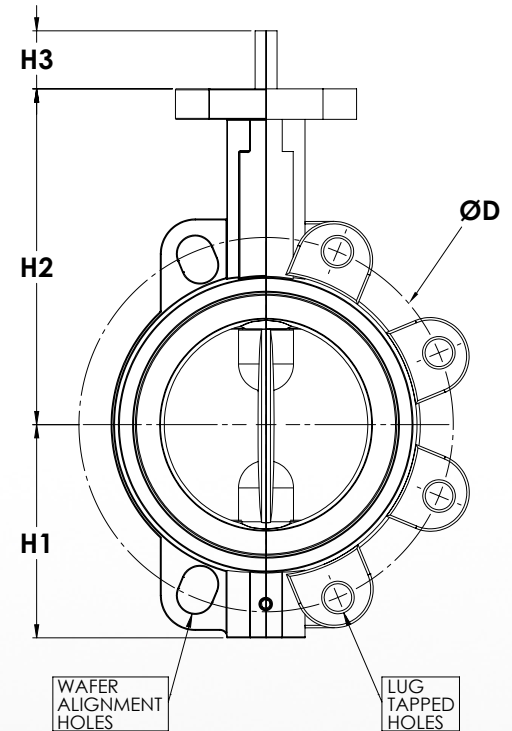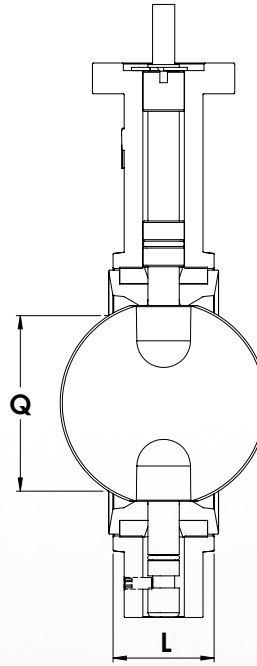

Ductile Iron Butterfly Valves

Size		L		Q		ØD		Lug Taps	Wafer Holes		H1		H2		H3		S		ØF		ISO
in	mm	in	mm	in	mm	in	mm	SAE Thread	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	
1½	DN40	1.3	33	0.8	21	3.88	98.5	1½" - 13 UNC	4 x 0.7	4 x 18	2.5	64	4.9	124	1.18	30	0.354	9	1.969	50	F05
2	DN50	1.7	43	1.1	29	4.75	120.7	4 x 5/8" -11 UNC	4 x 0.9	4 x 22	2.6	66	5.1	130	1.18	30	0.354	9	1.969	50	F05
2½	DN65	1.8	46	1.8	45	5.50	139.7	4 x 5/8" -11 UNC	4 x 0.7	4 x 18	3.2	81	5.6	142	1.18	30	0.354	9	1.969	50	F05
3	DN75	1.8	46	2.5	62	6.00	152.4	4 x 5/8" -11 UNC	4 x 0.7	4 x 18	3.5	89	5.8	147	1.18	30	0.354	9	1.969	50	F05
4	DN100	2.0	52	3.5	89	7.50	190.5	8 x 5/8" -11 UNC	4 x 0.7	4 x 18	4.3	109	6.7	170	1.18	30	0.433	11	2.756	70	F07
5	DN125	2.2	56	4.6	116	8.50	215.9	8 x 3/4" -10 UNC	4 x 0.9	4 x 22	4.8	122	7.4	188	1.18	30	0.551	14	2.756	70	F07
6	DN150	2.2	56	5.7	145	9.50	241.3	8 x 3/4" -10 UNC	4 x 0.9	4 x 22	5.4	137	8.0	203	1.18	30	0.551	14	2.756	70	F07
8	DN200	2.4	60	7.8	197	11.75	298.5	8 x 3/4" -10 UNC	4 x 1.0	4 x 26	6.7	170	9.4	239	1.57	40	0.669	17	4.016	102	F10
10	DN250	2.7	68	9.8	248	14.25	362.0	12 x 7/8" -9 UNC	4 x 1.0	4 x 26	7.9	201	10.7	272	1.57	40	0.866	22	4.016	102	F10
12	DN300	3.1	78	11.7	298	17.00	431.8	12 x 7/8" -9 UNC	4 x 1.0	4 x 26	9.3	236	12.0	305	1.57	40	0.866	22	4.016	102	F10
14	DN350	3.1	78	—	—	18.75	476.3	12 x 1" -8 UNC	—	—	10.3	262	13.0	330	1.57	40	0.866	22	4.016	102	F10
16	DN400	4.0	102	—	—	21.25	539.8	16 x 1" -8 UNC	—	—	11.8	300	14.2	361	2.00	51	1.063	27	5.512	140	F14
18	DN450	4.5	114	—	—	22.75	577.9	16 x 1 1/8" -7 UNC	—	—	12.8	325	15.6	396	2.00	51	1.063	27	5.512	140	F14
20	DN500	5.0	127	—	—	25.00	635.0	20 x 1 1/8" -7 UNC	—	—	14.2	361	17.3	439	2.52	64	1.063	27	6.496	165	F16
24	DN600	6.1	154	—	—	29.50	749.3	20 x 1 1/4" -7 UNC	—	—	16.5	419	19.7	500	2.76	70	1.417	36	6.496	165	F16

Optional Infinite Locking Plates

Valve Sizes		ILP Plate	ILP Arm
in	mm		
1.5-3	DN40-75	02A	07S
4	DN100	02/02A	03/03S
5-6	DN125-150	02/02A	04/04S
8*	DN200*	03/03A	05/05S
10-12*	DN250-300*	03/03A	06/06S

*Recommended operation with a gear operator or an actuator for sizes 8"-12"

Over-Travel on Infinite 2-Position Lock Option Allows Disc to Wipe Seat




Locking Arm (Included w/ Plate)



The **standard** 10-position throttle plate has grooves that allow the handle to snap in place for repeatability and to prevent unintentional movement of the disc.

For even more control, **Infinite Lever Plates (ILP)** and arms are available, which allow the valve to be fixed in place with a bolt at any position. It is important to note that the ILP plates and locking arms can be padlocked in the full open and full closed positions only, to prevent tampering or accidental operation.

D Series Butterfly Valves Gear and Handle Options

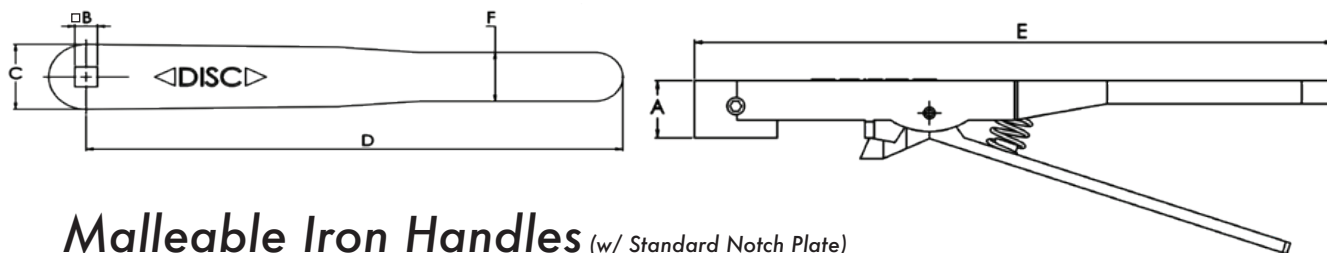


Malleable Iron Handles (w/ Standard Notch Plate)

Handle Part #	Valve Sizes		A		B		C		D		E		F		Weight	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
HND-M01	1.5-3	DN50-75	1.0	26	0.35	9.0	1.3	33	8.9	225	9.4	240	1.1	28	2.4	1.1
HND-M02	4	DN100	1.0	26	0.43	11.0	1.4	35	10.2	260	11.0	280	1.1	28	2.6	1.2
HND-M03	5-6	DN125-150	1.0	26	0.55	14.0	1.4	35	10.2	260	11.0	280	1.1	28	2.9	1.3
HND-M04	8*	DN200*	1.2	30	0.67	17.0	1.9	49	14.0	355	15.2	385	1.3	32	5.7	2.6
HND-M05	10-12*	DN250-300*	1.2	30	0.87	22.0	1.9	49	14.0	355	15.2	385	1.3	32	5.7	2.6


*Recommended operation with a gear operator or an actuator for sizes 8"-12"

Cast Iron Gear Operators


Valve Sizes		Gear Operator	A		B		ØH		Weight		Max Torque		Rim Pull @ Max DP	
in	mm		in	mm	in	mm	in	mm	lbs	kg	in-lbs	Nm	lbf	N
1.5-3	DN50-75	MA-GO-01A-ISO	1.7	43	3.2	81	6	152	2.8	1.3	1330	150	13	58
4	DN100	MA-GO-01B-ISO	2.5	43	3.2	81	6	152	2.8	1.3	1330	150	20	89
5-6	DN125-150	MA-GO-02-ISO	2.5	64	3.6	91	6	152	5.6	2.5	1770	200	46	205
8	DN200	MA-GO-03A-ISO	2.4	61	4.7	119	10	254	11.5	5.2	4425	500	36	160
10	DN250	MA-GO-03B-ISO	2.4	61	4.7	119	10	254	11.5	5.2	4425	500	74	329
12-14	DN300-350	MA-GO-04-ISO	2.6	66	6.5	165	12	305	22.2	10.1	8850	1000	86	383
16-18	DN400-450	MA-GO-05-ISO	3.5	89	7.9	201	16	406	40.8	18.5	15900	1800	102	454
20	DN500	MA-GO-06-ISO	5.0	127	10.1	257	16	406	78.1	35.4	30090	3400	107	476
24	DN600	MA-GO-07-ISO	6.1	155	12.4	315	16	406	101	45.8	39825	4500	127	565

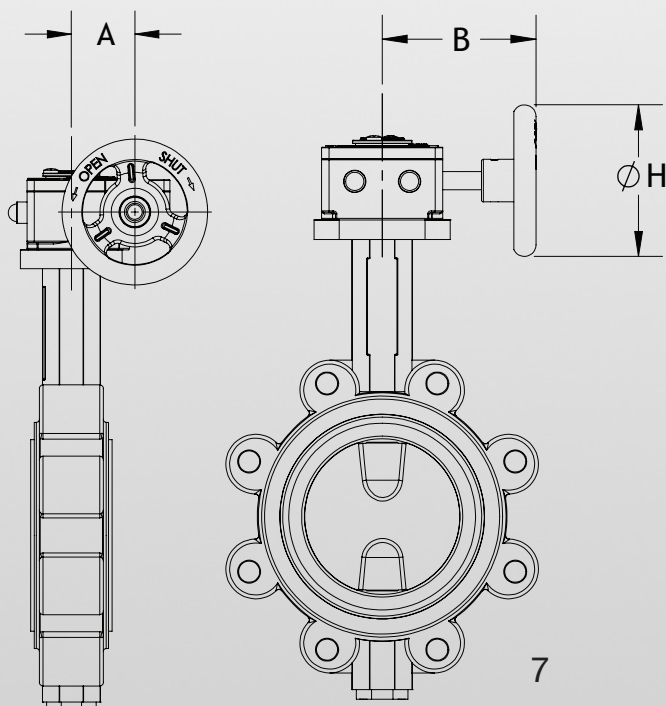

D Series Butterfly Valves (1.5"-12")
Exploded View



ALUMINUM
TAG DETAIL

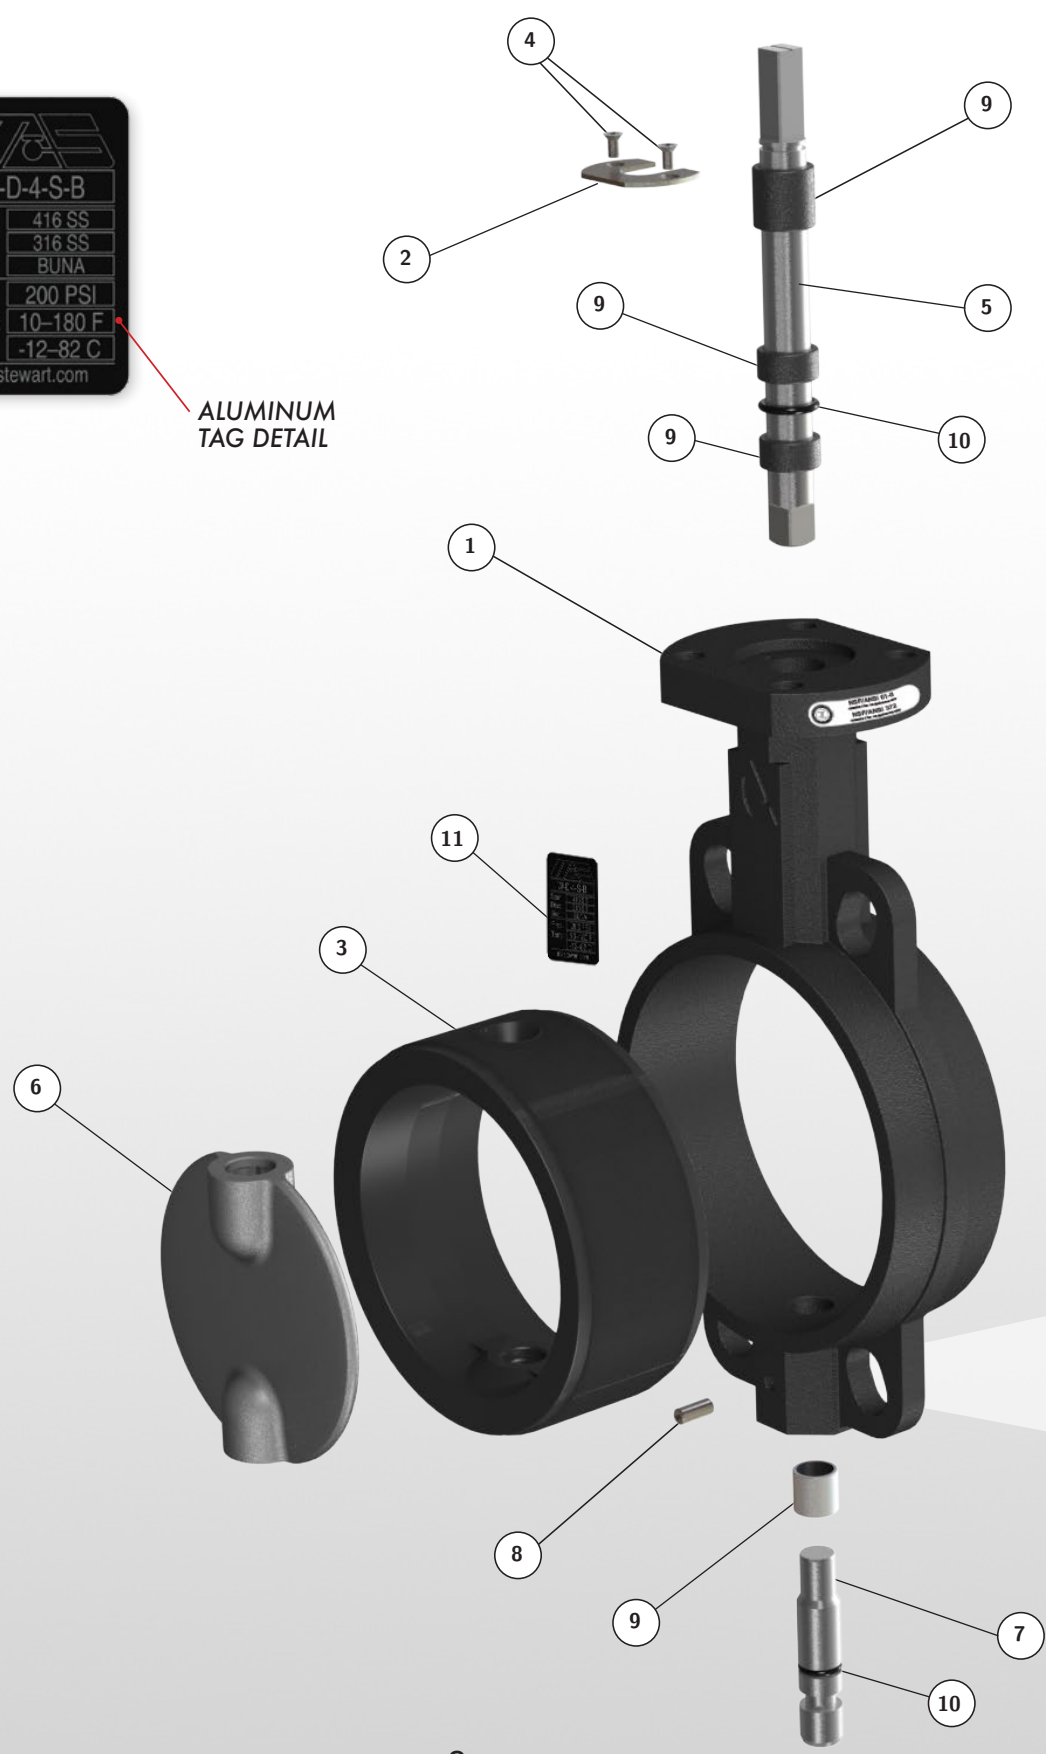


D Series Butterfly Valves (1.5"-12") Materials and Stem Details

Bill of Materials



Item	Description	Materials
1	Body	Ductile Iron ASTM A536
2	Stem Retainer	Carbon Steel, Plated
3	Seat	See Pg 24 or 25
4	Stem Retainer Screws	Carbon Steel, Plated
5	Upper Stem	Stainless Steel ASTM A582, Alloy 416, 316SS Option
6	Disc	See Pg 26 or 27
7	Lower Stem	Stainless Steel ASTM A582, Alloy 416, 316SS Option
8	Lower Stem Retainer	Carbon Steel, Plated
9	Bushing	PTFE/Graphite
10	O-Ring	EPDM, BUNA-N, Fluoroelastomer
11	Nameplate Tag	Aluminum (see detail)



Lower Stem Detail

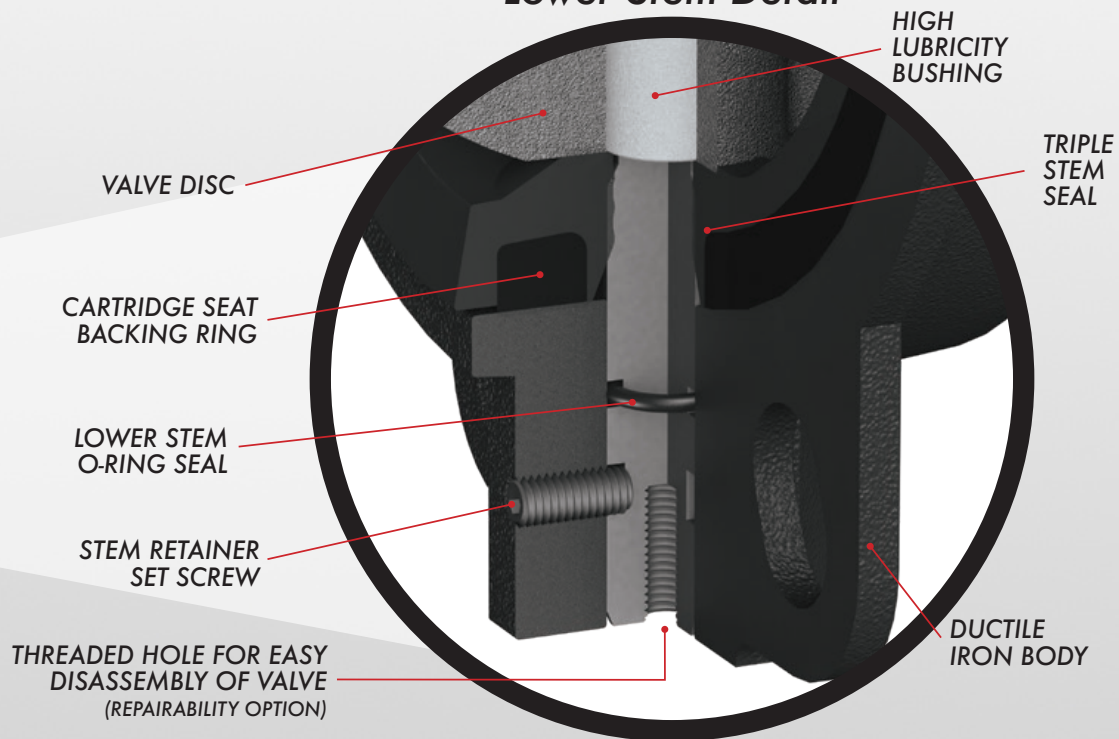

D Series Butterfly Valves (14"-24")
Exploded View

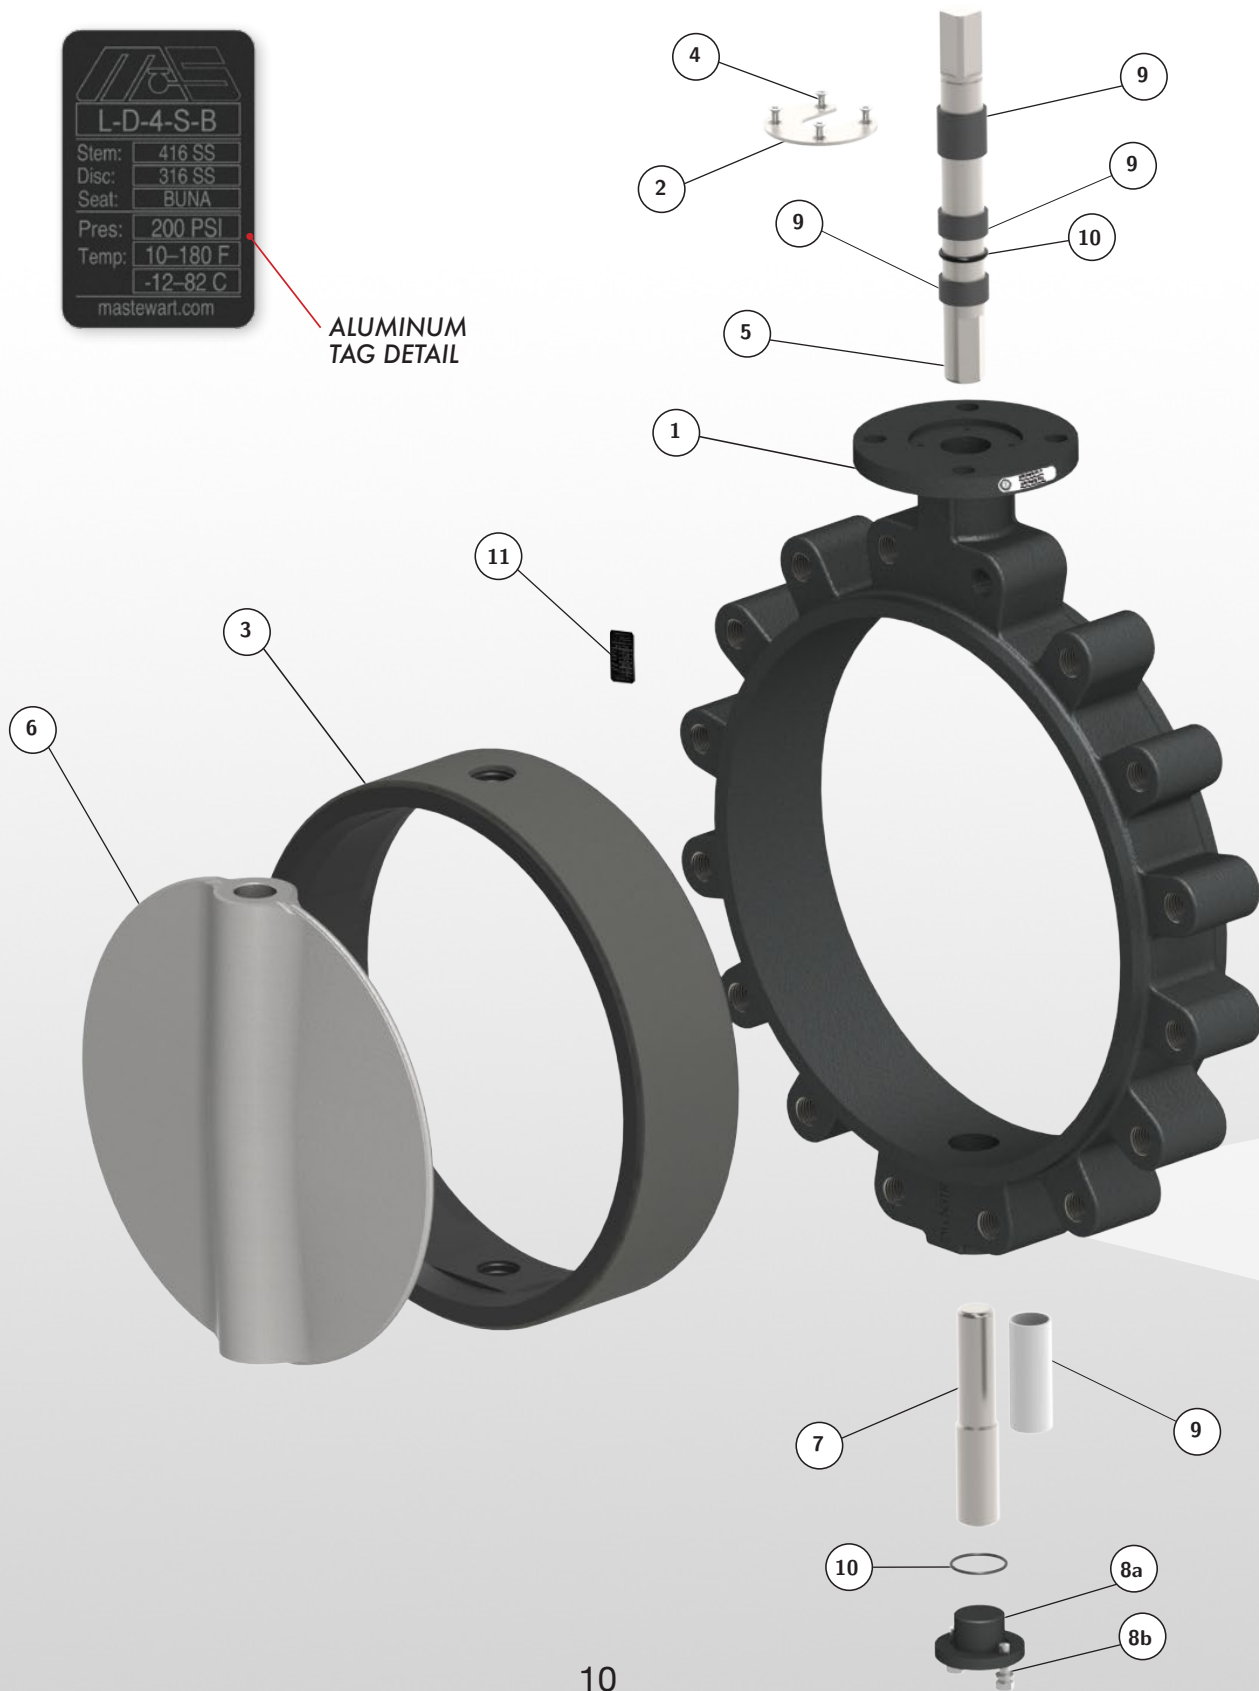


D Series Butterfly Valves (14"-24") Materials and Stem Details

Bill of Materials

Item	Description	Materials
1	Body	Ductile Iron ASTM A536
2	Stem Retainer	Carbon Steel, Plated
3	Seat	See Pg 24 or 25
4	Stem Retainer Screws	Carbon Steel, Plated
5	Upper Stem	Stainless Steel ASTM A582, Alloy 416 or 410, 316SS Option
6	Disc	See Pg 26 or 27
7	Lower Stem	Stainless Steel ASTM A582, Alloy 416 or 410, 316SS Option
8a	Lower Stem Retainer	Ductile Iron ASTM A536
8b	Lower Stem Retainer Bolts and Washers	Carbon Steel, Plated
9	Bushing	PTFE/Graphite
10	O-Ring	EPDM, BUNA-N, Fluoroelastomer
11	Nameplate Tag	Aluminum (see detail)



Lower Stem Detail

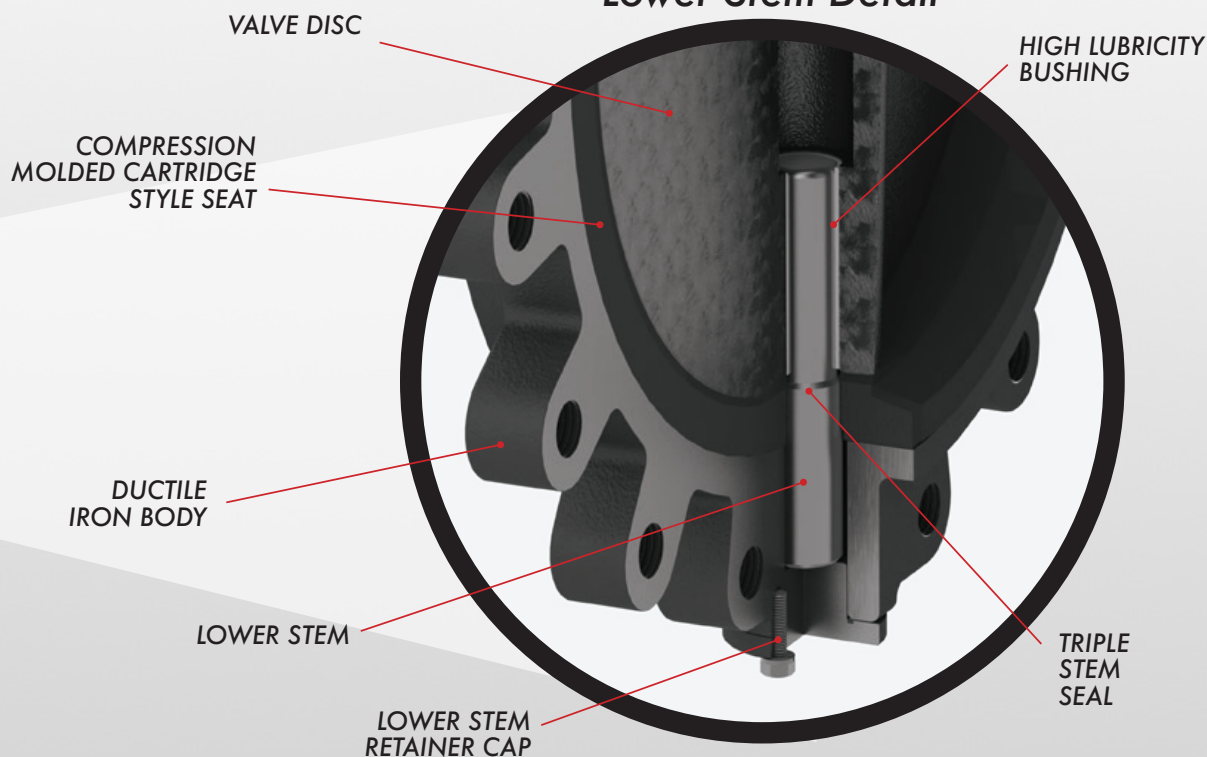

D Series Butterfly Valves

Torques, Service Factor Rating, & Pressure Rating

Seating Torques (in-lbs)

	STANDARD SEAT				UNDERCUT DISC	PTFE SEAT		
Size (in)	Pressure Differential (ΔP in PSI)							
	50 ΔP	100 ΔP	150 ΔP	200 ΔP	50 ΔP	50 ΔP	100 ΔP	150 ΔP
1½	105	111	117	124	—	—	—	—
2	105	111	117	124	—	144	148	150
2½	133	143	159	184	—	161	165	168
3	191	203	218	247	—	299	304	310
4	283	316	343	373	200	392	409	425
5	428	479	540	631	330	771	793	814
6	636	720	799	909	440	1074	1113	1151
8	1239	1273	1411	1505	820	2106	2177	2257
10	2567	2710	2832	3105	1150	3151	3301	3452
12	3153	3307	3671	4305	2400	4186	4443	4691
14	3858	4138	4337	—	Consult Manufacturer			
16	5413	6027	7466	—				
18	6833	8121	10090	—				
20	9820	10527	13367	—				
24	15909	17005	21041	—				

The torque values listed above do not include a safety factor. It is recommended that a safety factor of 20% be added to these numbers for standard self-lubricating service. For water, dry air, solvents, abrasives, powder, and dust service, see service factor guide chart on next page.

Service Factor Rating

Service Condition	Service Type	Media Type	Safety Factor	Multiplier
1	Ideal	Lubricating Oil	20%	1.20
2	Normal	Water	30%	1.30
3	Severe	Dry Air, Solvents	50%	1.50
4	Extreme	Abrasives	100%	2.00

This service factor chart is a suggested guide only. Actual service conditions will vary due to dynamic flow conditions and may require adjustments to the applied safety factor.

Pressure Rating

	D SERIES		
Size	1.5"–12"	14"–48"	2"–12" (PTFE)
Bidirectional Shutoff	200 PSI	150 PSI	150 PSI

Cv Values

Valve Sizing Coefficients (US-GPM/ ΔP)

Size (in)	Disc Position								
	90°	80°	70°	60°	50°	40°	30°	20°	10°
1½	99	76	59	41	32	16	7	1.8	0.1
2	132	120	86	58	42	22	11	2	0.1
2½	256	202	142	98	65	37	20	4	0.2
3	505	392	198	125	86	38	21	8	0.3
4	936	702	401	232	140	77	35	14	0.4
5	1109	922	625	392	232	132	62	29	0.9
6	2531	2009	1105	611	372	203	96	42	2.1
8	4812	3555	1901	1211	726	401	191	65	3.2
10	7498	6183	3740	2065	1232	695	321	151	3.9
12	9928	8805	5905	3178	1909	1065	495	234	5
14	12915	10854	7220	4560	2771	1554	712	338	5.8
16	16626	14961	9909	6289	3780	2133	980	460	8
18	23705	19743	13178	8325	5029	2822	1301	613	10
20	27915	25396	16928	10698	6468	3623	1678	790	12
24	43212	39206	26128	16550	9807	5567	2521	860	21

The valve sizing coefficient is referred to as "Cv" and is the rate of water flow in gallons per minute (GPM) through a given opening at a pressure drop (ΔP) of 1 PSI at standard room temperature. The recommended angle of opening for valve sizing is between 50° and 70° open.

Weights


Size		Wafer		Lug		Individual Handle		Individual Gear Operator	
in	mm	lbs	kg	lbs	kg	lbs	kg	lbs	kg
1½	DN40	4.2	1.9	—	—	2.4	1.1	2.8	1.3
2	DN50	4.2	1.9	5.2	2.4	2.4	1.1	2.8	1.3
2½	DN65	5.5	2.5	6.5	3.0	2.4	1.1	2.8	1.3
3	DN75	6.1	2.8	7.3	3.3	2.4	1.1	2.8	1.3
4	DN100	9.0	4.1	12.5	5.7	2.6	1.3	2.8	1.3
5	DN125	12.6	5.7	16.9	7.7	2.9	1.3	5.6	2.5
6	DN150	15.1	6.9	20.4	9.3	2.9	1.3	5.6	2.5
8	DN200	27.0	12.3	33.3	15.1	5.7	2.6	11.5	5.2
10	DN250	40.8	18.5	54.5	24.7	5.7	2.6	11.5	5.2
12	DN300	60.7	27.6	76.2	34.6	5.7	2.6	22.2	10.1
14	DN350	86.9	39.4	131.5	59.7	—	—	22.2	10.1
16	DN400	121.4	55.1	194.8	88.4	—	—	40.8	18.5
18	DN450	154.2	69.9	235.5	106.8	—	—	40.8	18.5
20	DN500	208.5	94.6	340.5	154.4	—	—	78.1	35.4
24	DN600	387.9	176.0	503.0	228.2	—	—	101	45.8



S Series Butterfly Valves


Features & Benefits

Stainless Steel Body - Lug & Wafer Styles

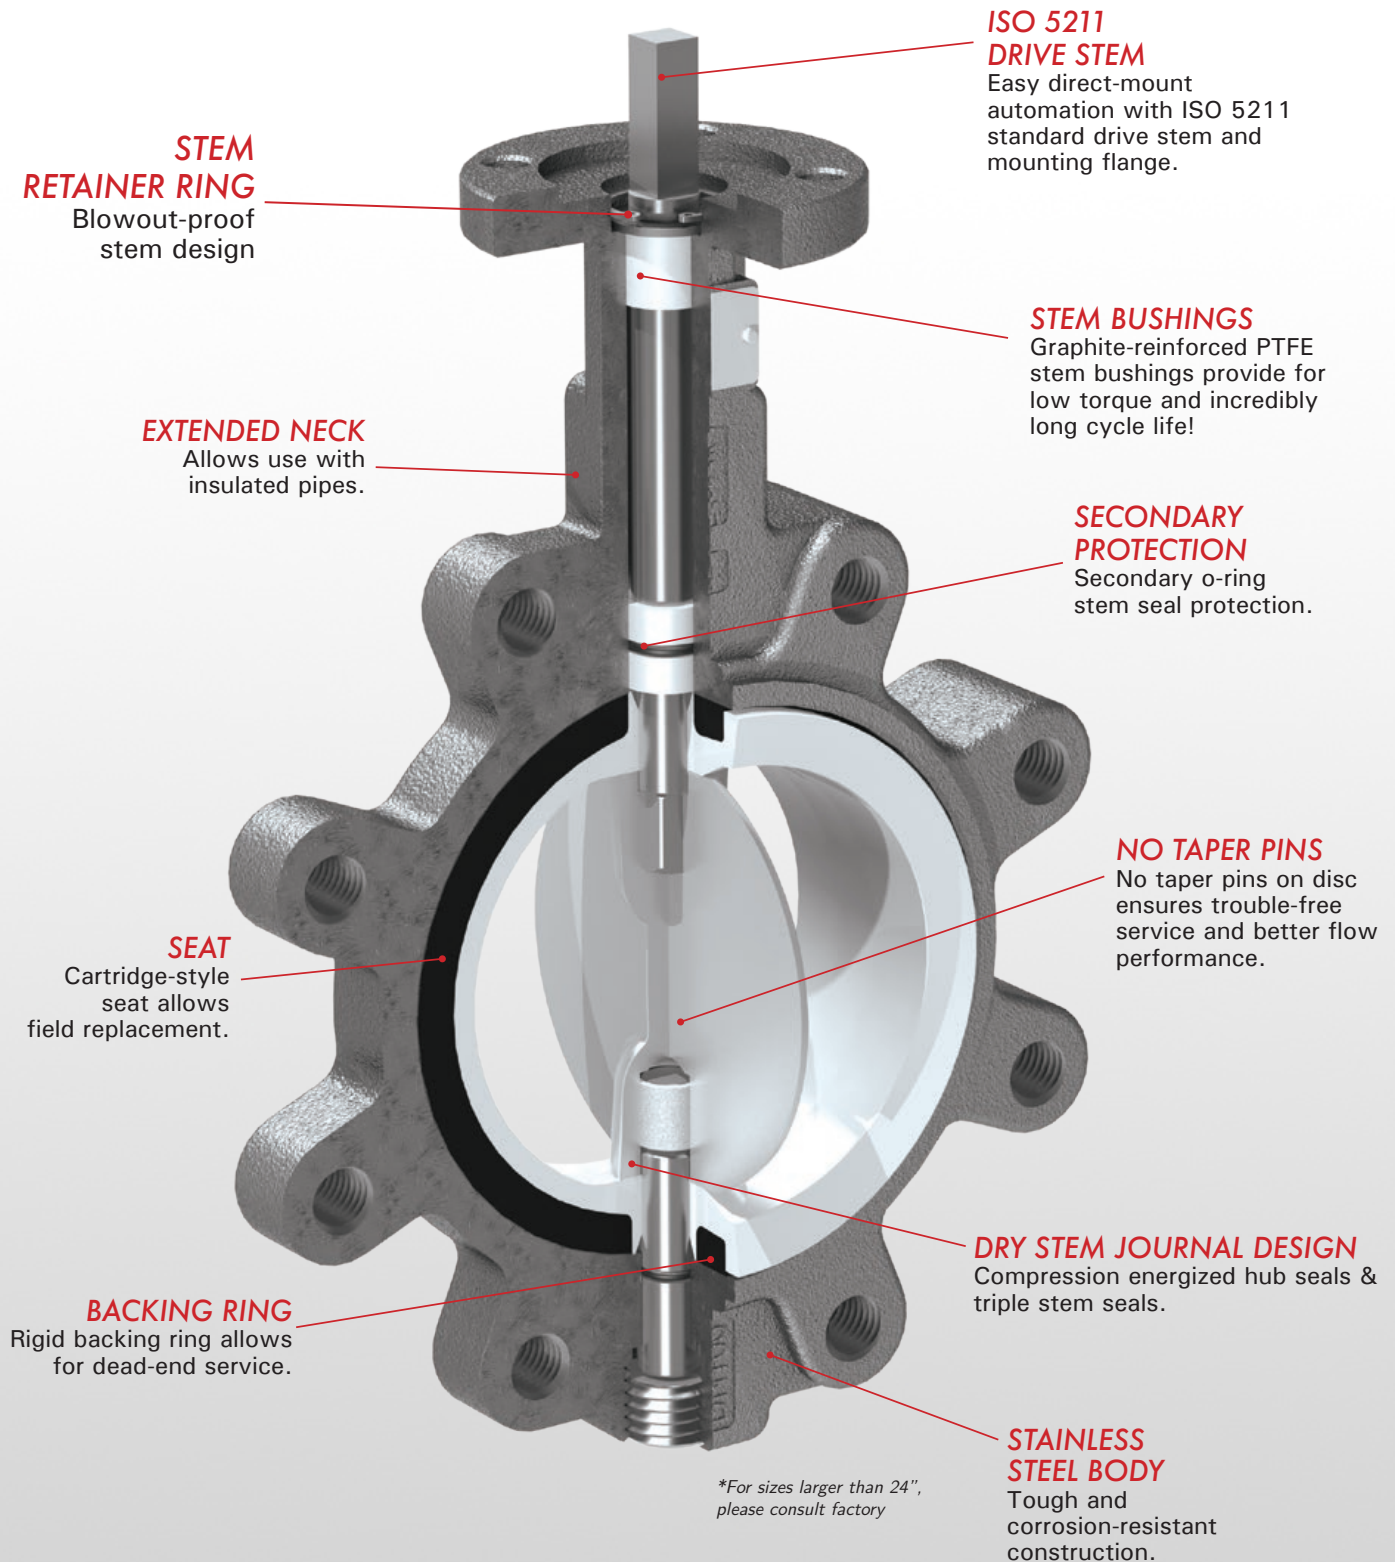


S Series Butterfly

- Wafer Stainless Steel Body sizes 2" - 24"
- Lug Stainless Steel Body sizes 2" - 24"
- Lug-style dead end service capabilities through 12":
 - 200 PSI uni-directional
 - 100 PSI bi-directional(Designated w/ flow arrow)
- Install between Standard ANSI class 125/150 flanges
- ISO 5211 square drive shaft for easy automation
- Conforms to MSS-SP-67, MSS-SP-25, API-609
- Designed for blowout-proof service
- High-Cv slim disc & 2-piece stem design 2"-12"
- Field repairable
- Vacuum service capable 2" thru 12" to 10 microns
- 304 SS Handles available
- Cast Iron Gear Operators available

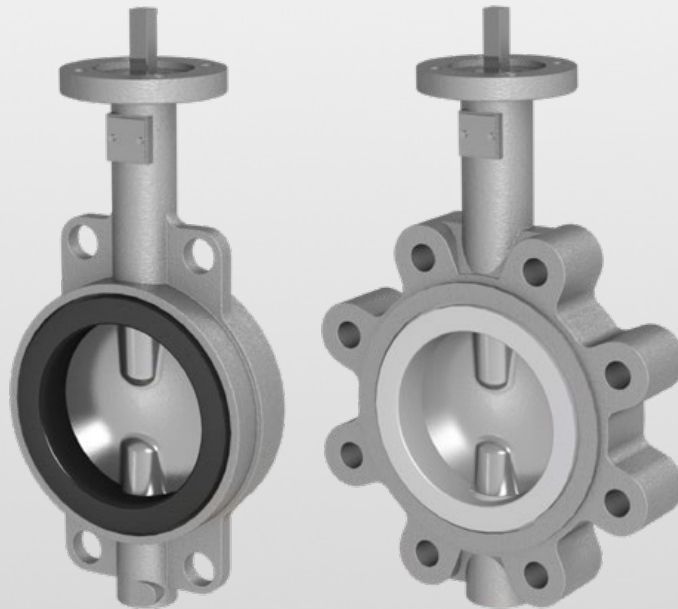

S Series Butterfly Valves

Dimensions

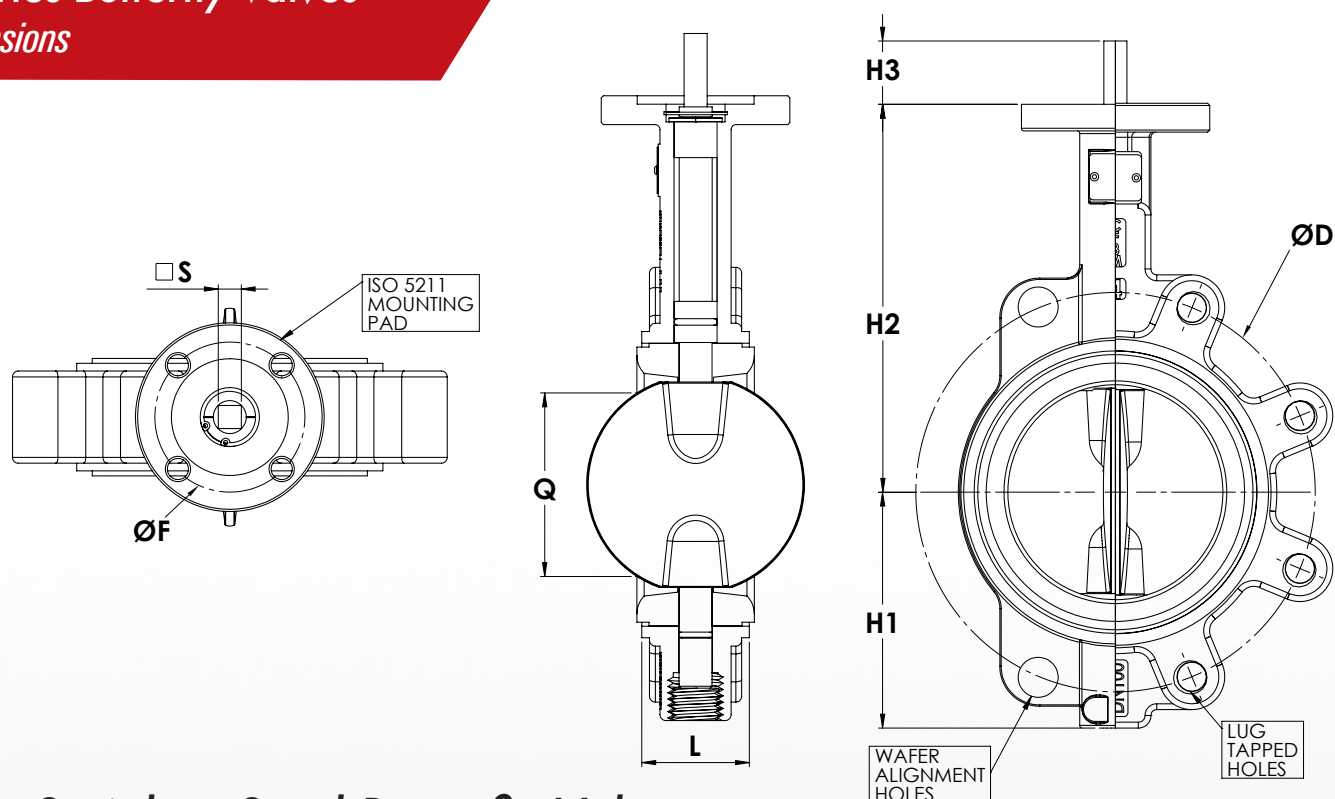


Stainless Steel Butterfly Valves

Size		L		Q		ØD		Lug Taps		Wafer Holes		H1		H2		H3		□ S		ØF		ISO
in	mm	in	mm	in	mm	in	mm	SAE Thread		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	
2	DN50	1.7	43	1.1	29	4.75	120.7	4 x 5/8"-11 UNC		4 x 0.9	4 x 22	2.6	66	5.1	130	1.18	30	0.354	9	1.969	50	F05
2½	DN65	1.8	46	1.8	45	5.50	139.7	4 x 5/8"-11 UNC		4 x 0.7	4 x 18	3.2	81	5.6	142	1.18	30	0.354	9	1.969	50	F05
3	DN75	1.8	46	2.5	62	6.00	152.4	4 x 5/8"-11 UNC		4 x 0.7	4 x 18	3.5	89	5.8	147	1.18	30	0.433	11	1.969	50	F05
4	DN100	2.0	52	3.5	89	7.50	190.5	8 x 5/8"-11 UNC		4 x 0.7	4 x 18	4.3	109	6.7	170	1.18	30	0.433	11	2.756	70	F07
5	DN125	2.2	56	4.6	116	8.50	215.9	8 x 3/4"-10 UNC		4 x 0.9	4 x 22	4.8	122	7.4	188	1.18	30	0.551	14	2.756	70	F07
6	DN150	2.2	56	5.7	145	9.50	241.3	8 x 3/4"-10 UNC		4 x 0.9	4 x 22	5.4	137	8.0	203	1.18	30	0.551	14	2.756	70	F07
8	DN200	2.4	60	7.8	197	11.75	298.5	8 x 3/4"-10 UNC		4 x 1.0	4 x 26	6.7	170	9.4	239	1.57	40	0.669	17	4.016	102	F10
10	DN250	2.7	68	9.8	248	14.25	362.0	12 x 7/8"-9 UNC		4 x 1.0	4 x 26	7.9	201	10.7	272	1.57	40	0.866	22	4.016	102	F10
12	DN300	3.1	78	11.7	298	17.00	431.8	12 x 7/8"-9 UNC		4 x 1.0	4 x 26	9.3	236	12.0	305	1.57	40	0.866	22	4.016	102	F10
14	DN350	3.1	78	—	—	18.75	476.3	12 x 1" -8 UNC		—	—	10.3	262	13.0	330	1.57	40	0.866	22	4.016	102	F10
16	DN400	4.0	102	—	—	21.25	539.8	16 x 1" -8 UNC		—	—	11.8	300	14.2	361	2.00	51	1.063	27	5.512	140	F14
18	DN450	4.5	114	—	—	22.75	577.9	16 x 1 1/8" -7 UNC		—	—	12.8	325	15.6	396	2.00	51	1.063	27	5.512	140	F14
20	DN500	5.0	127	—	—	25.00	635.0	20 x 1 1/8" -7 UNC		—	—	14.2	361	17.3	439	2.52	64	1.063	27	6.496	165	F16
24	DN600	6.1	154	—	—	29.50	749.3	20 x 1 1/4" -7 UNC		—	—	16.5	419	19.7	500	2.76	70	1.417	36	6.496	165	F16

Optional Infinite Locking Plates

Valve Sizes		ILP Plate	ILP Arm
in	mm		
2-2.5	DN50-65	02A	07S
3	DN75	02A	03S
4	DN100	02A	03S
5-6	DN125-150	02A	04S
8	DN200*	03A	05S
10-12	DN250-300*	03A	06S



*Recommended operation with a gear operator or an actuator for sizes 8"-12"

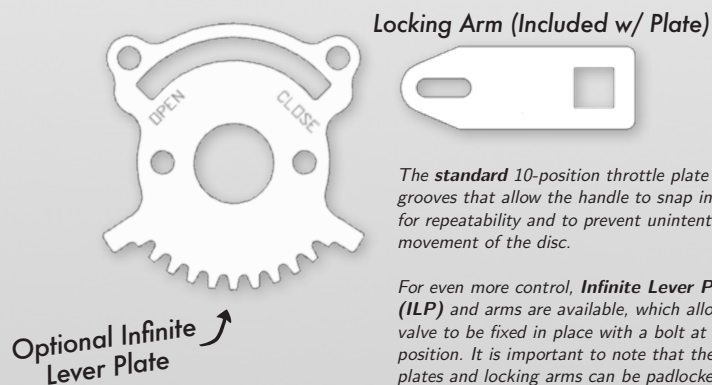

The **standard** 10-position throttle plate has grooves that allow the handle to snap in place for repeatability and to prevent unintentional movement of the disc.

For even more control, **Infinite Lever Plates (ILP)** and arms are available, which allow the valve to be fixed in place with a bolt at any position. It is important to note that the ILP plates and locking arms can be padlocked in the full open and full closed positions only, to prevent tampering or accidental operation.

S Series Butterfly Valves Gear and Handle Options

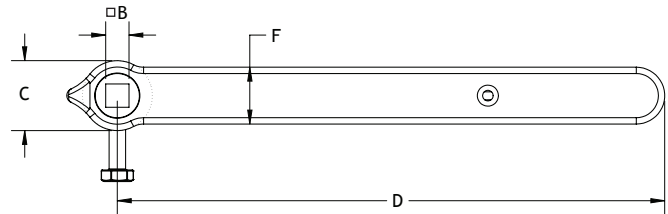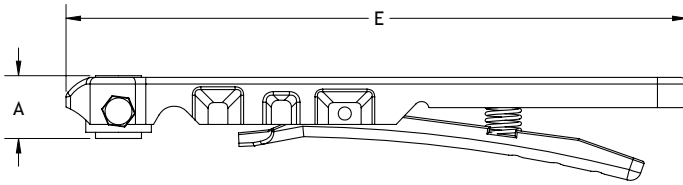



Stainless Steel Handles (w/ Standard Notch Plate)

Handle Part #	Valve Sizes		A		B		C		D		E		F		Weight	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
HND-S01	2-2.5	DN50-75	1.1	28	0.35	9.0	1.3	34	10.2	260	11.2	285	1.1	27	2.2	1.0
HND-S02	3-4	DN100	1.1	28	0.43	11.0	1.3	34	10.2	260	11.2	285	1.1	27	2.2	1.0
HND-S03	5-6	DN125-150	1.1	28	0.55	14.0	1.3	34	10.2	260	11.2	285	1.1	27	2.2	1.0
HND-S04	8*	DN200*	1.2	30	0.67	17.0	1.9	49	14.7	373	15.7	400	1.3	33	5.5	2.5
HND-S05	10-12*	DN250-300*	1.2	30	0.87	22.0	1.9	49	14.7	373	15.7	400	1.3	33	5.5	2.5

*Recommended operation with a gear operator or an actuator for sizes 8"-12"

Cast Iron Gear Operators


Valve Sizes		Gear Operator	A		B		ØH		Weight		Max Torque		Rim Pull @ Max DP	
in	mm		in	mm	in	mm	in	mm	lbs	kg	in-lbs	Nm	lbf	N
1.5-3	DN50-75	MA-GO-01A-ISO	1.7	43	3.2	81	6	152	2.8	1.3	1330	150	13	58
4	DN100	MA-GO-01B-ISO	2.5	43	3.2	81	6	152	2.8	1.3	1330	150	20	89
5-6	DN125-150	MA-GO-02-ISO	2.5	64	3.6	91	6	152	5.6	2.5	1770	200	46	205
8	DN200	MA-GO-03A-ISO	2.4	61	4.7	119	10	254	11.5	5.2	4425	500	36	160
10	DN250	MA-GO-03B-ISO	2.4	61	4.7	119	10	254	11.5	5.2	4425	500	74	329
12-14	DN300-350	MA-GO-04A-ISO	2.6	66	6.5	165	12	305	22.2	10.1	8850	1000	86	383
16-18	DN400-450	MA-GO-05B-ISO	3.5	89	7.9	201	16	406	40.8	18.5	15900	1800	102	454
20	DN500	MA-GO-06B-ISO	5.0	127	10.1	257	16	406	78.1	35.4	30090	3400	107	476
24	DN600	MA-GO-07-ISO	6.1	155	12.4	315	16	406	101	45.8	39825	4500	127	565

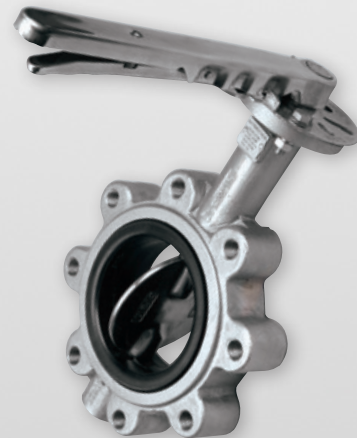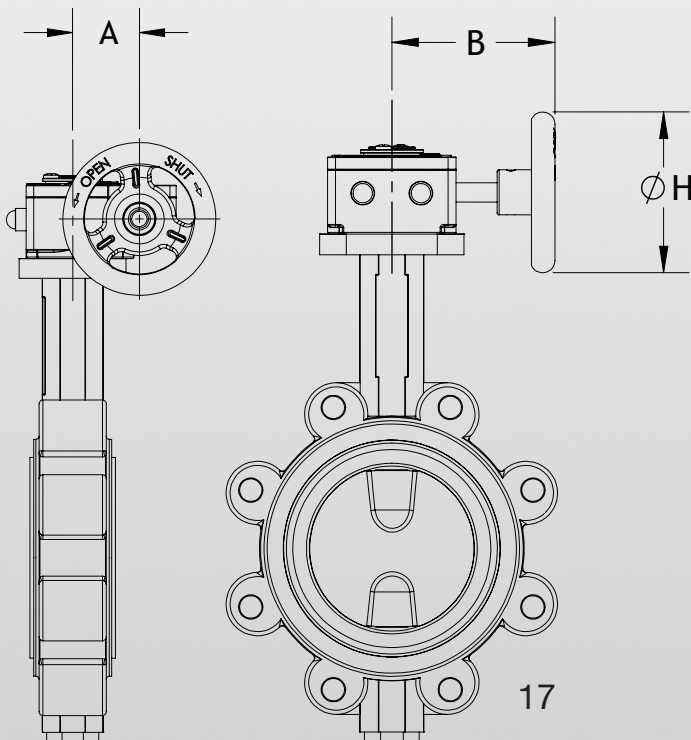

S Series Butterfly Valves (2"-12")
Exploded View



STAINLESS STEEL
TAG DETAIL

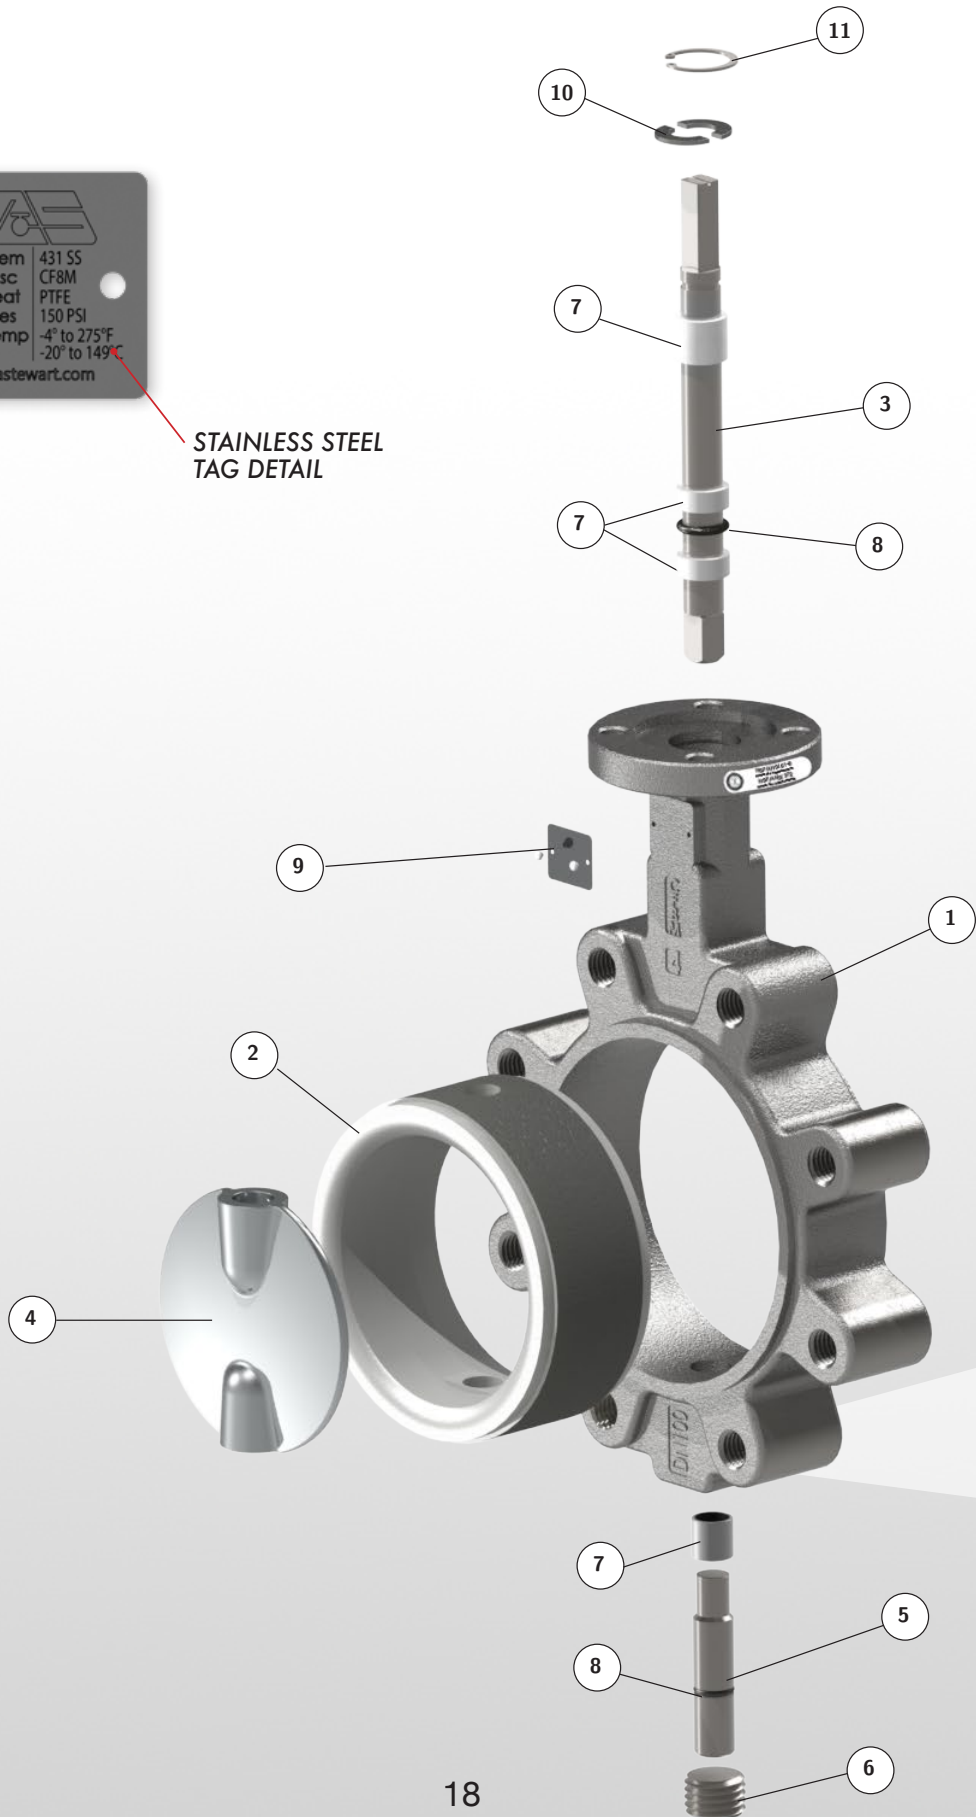

S Series Butterfly Valves (2"-12")


Materials and Stem Detail

Bill of Materials

Item	Description	Materials
1	Body	ASTM A351 grade CF8M
2	Seat	See Pg 24 or 25
3	Upper Stem	ASTM A276 431, 316SS Option
4	Disc	See Pg 26 or 27
5	Lower Stem	ASTM A276 431, 316SS Option
6	Lower Stem Retainer	304 SS
7	Stem Bushing	PTFE lined fiberglass
8	O-ring	Fluoroelastomer
9	Nameplate Tag	Stainless Steel (see detail)
10	Split Washer	1Cr13
11	Snap Ring	304 SS



Lower Stem Detail

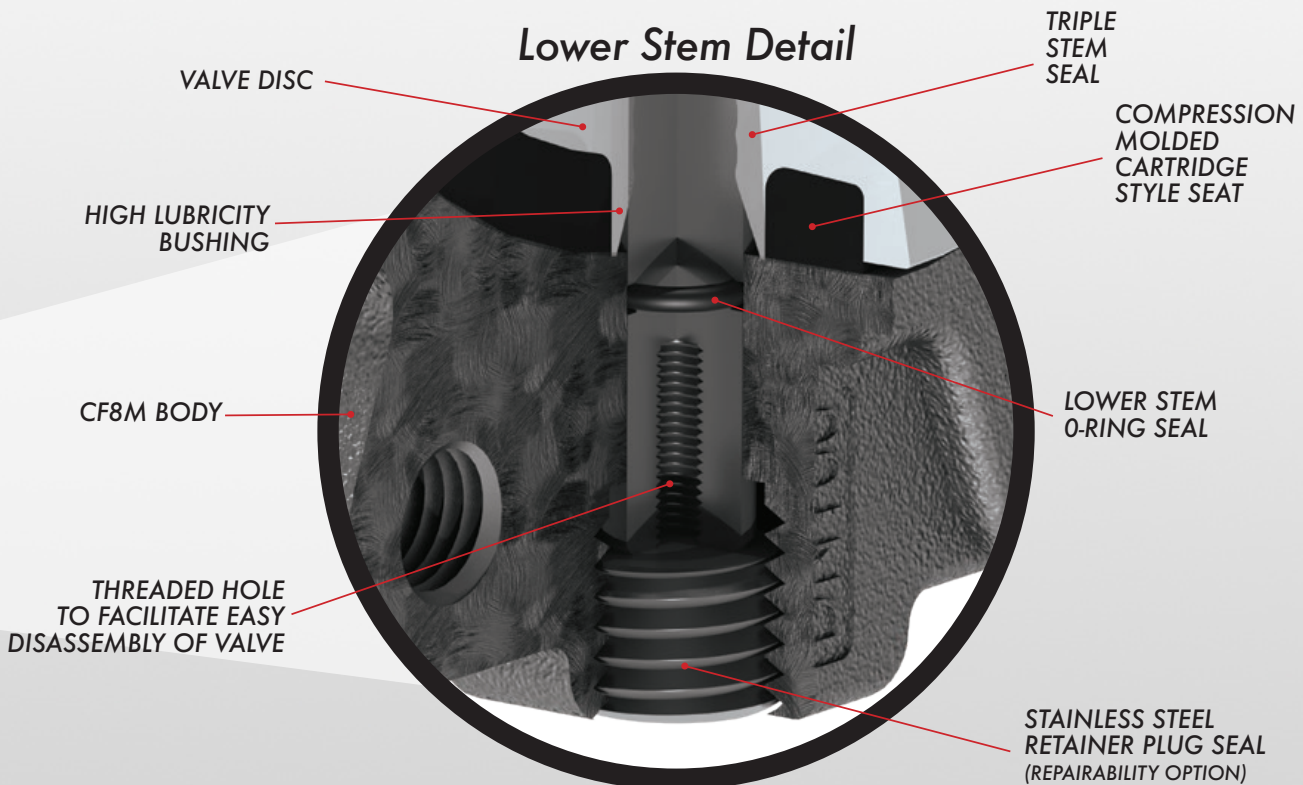


S Series Butterfly Valves (14"-24")

Exploded View



STAINLESS STEEL
TAG DETAIL

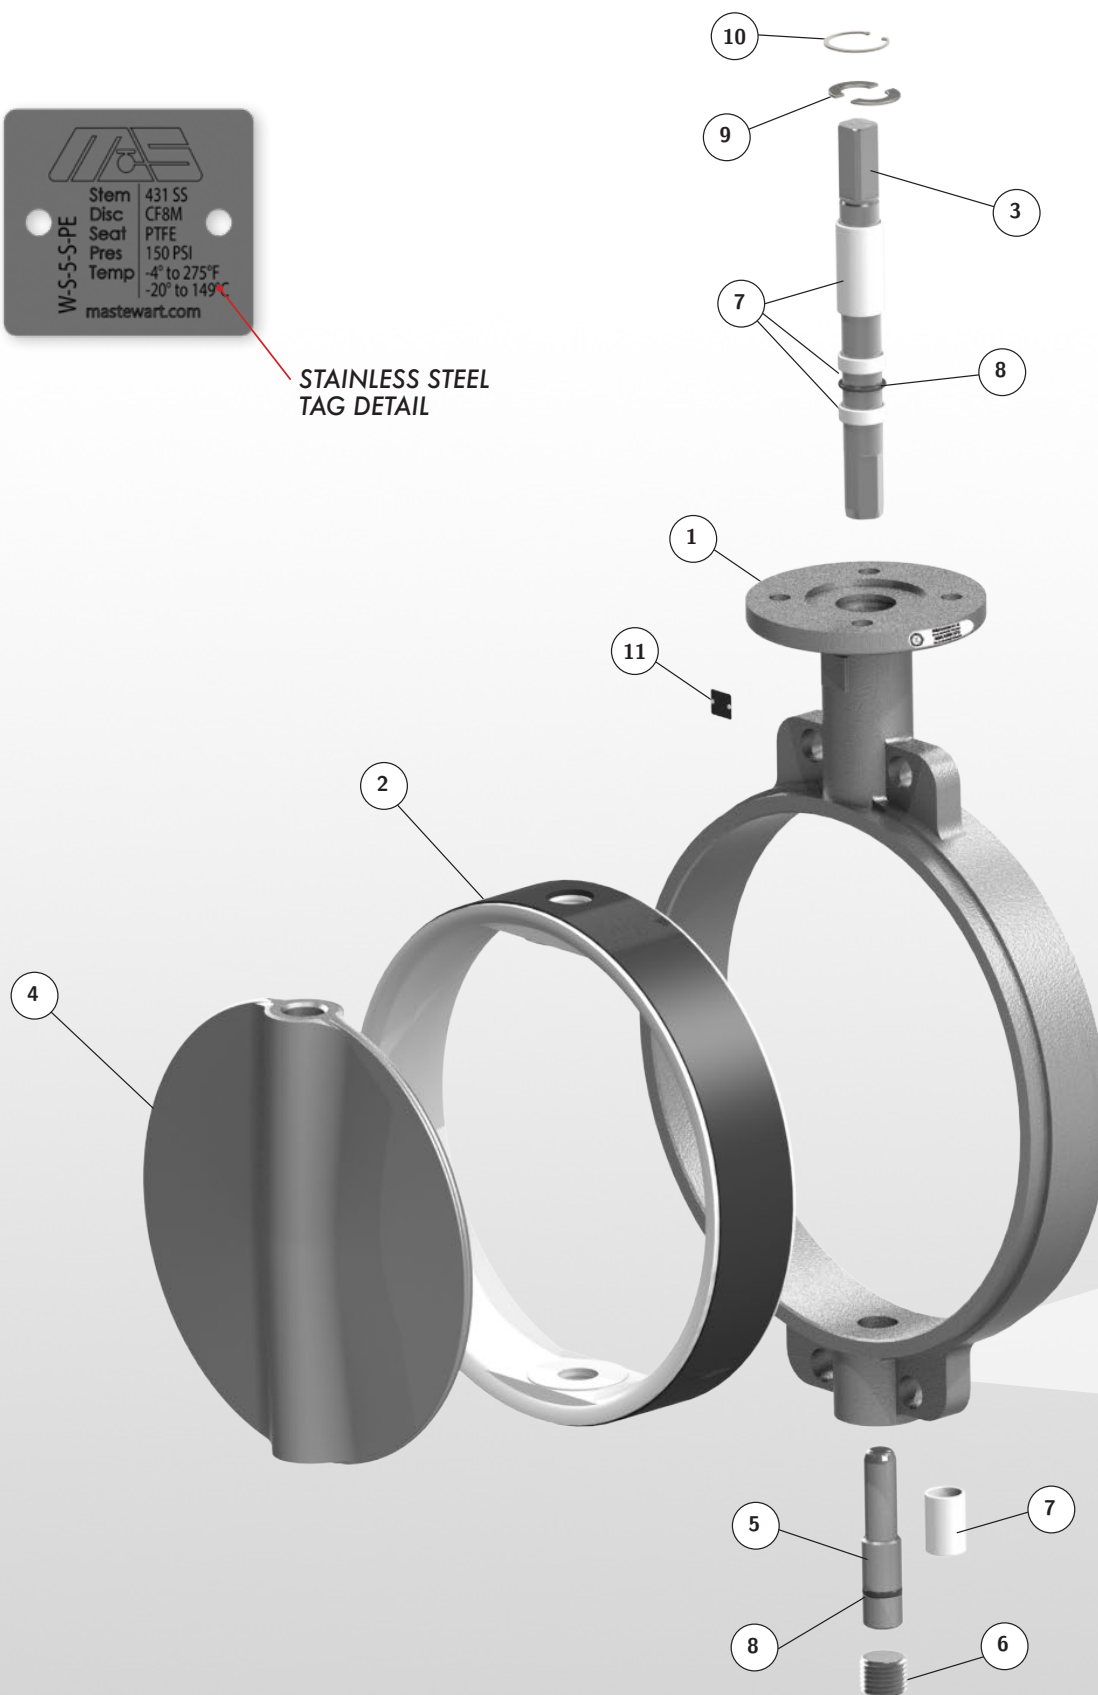


S Series Butterfly Valves (14"-24")

Materials and Stem Detail

Bill of Materials

Item	Description	Materials
1	Body	ASTM A351 grade CF8M
2	Seat	See Pg 24 or 25
3	Upper Stem	ASTM A276 431, 316SS Option
4	Disc	See Pg 26 or 27
5	Lower Stem	ASTM A276 431, 316SS Option
6	Lower Stem Retainer	304 SS
7	Stem Bushing	PTFE lined fiberglass
8	O-ring	Fluoroelastomer
9	Split Washer	1Cr13
10	Snap Ring	304 SS
11	Nameplate Tag	Stainless Steel (see detail)

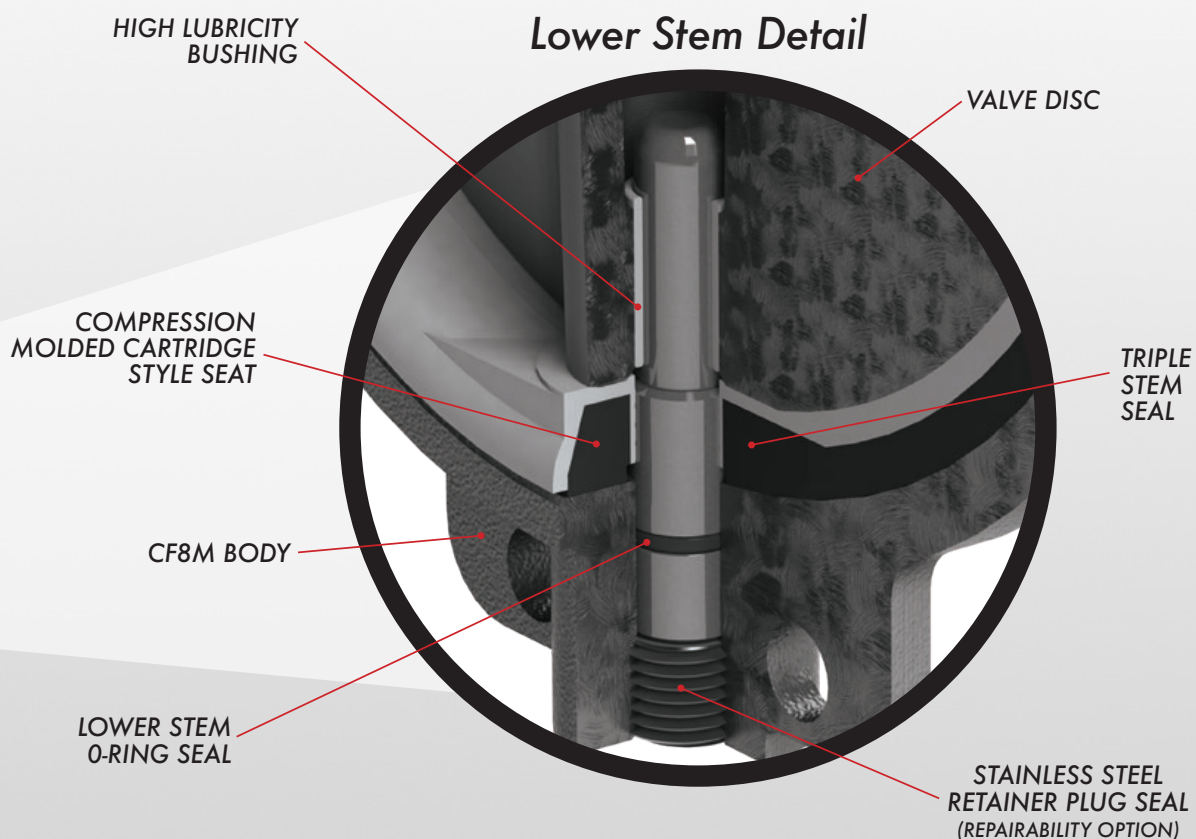

S Series Butterfly Valves

Torques, Service Factor Rating, & Pressure Rating

Seating Torques (in-lbs)

	STANDARD SEAT				UNDERCUT DISC	PTFE SEAT		
Size (in)	Pressure Differential (ΔP in PSI)							
	50 ΔP	100 ΔP	150 ΔP	200 ΔP	50 ΔP	50 ΔP	100 ΔP	150 ΔP
2	105	111	117	124	—	144	148	150
2½	133	143	159	184	—	161	165	168
3	191	203	218	247	—	299	304	310
4	283	316	343	373	200	392	409	425
5	428	479	540	631	330	771	793	814
6	636	720	799	909	440	1074	1113	1151
8	1239	1273	1411	1505	820	2106	2177	2257
10	2567	2710	2832	3105	1150	3151	3301	3452
12	3153	3307	3671	4305	2400	4186	4443	4691
14	3858	4138	4337	—	Consult Manufacturer			
16	5413	6027	7466	—				
18	6833	8121	10090	—				
20	9820	10527	13367	—				
24	15909	17005	21041	—				

The torque values listed above do not include a safety factor. It is recommended that a safety factor of 20% be added to these numbers for standard self-lubricating service. For water, dry air, solvents, abrasives, powder, and dust service, see service factor guide chart on next page.

Service Factor Rating

Service Condition	Service Type	Media Type	Safety Factor	Multiplier
1	Ideal	Lubricating Oil	20%	1.20
2	Normal	Water	30%	1.30
3	Severe	Dry Air, Solvents	50%	1.50
4	Extreme	Abrasives	100%	2.00

This service factor chart is a suggested guide only. Actual service conditions will vary due to dynamic flow conditions and may require adjustments to the applied safety factor.

Pressure Rating

Size	S SERIES		
	2"–12"	14"–48"	2"–12" (PTFE)
	Bidirectional Shutoff	200 PSI	150 PSI

Cv Values

Valve Sizing Coefficients (US-GPM/ ΔP)

Size (in)	Disc Position								
	90°	80°	70°	60°	50°	40°	30°	20°	10°
2	132	120	86	58	42	22	11	2	0.1
2½	256	202	142	98	65	37	20	4	0.2
3	505	392	198	125	86	38	21	8	0.3
4	936	702	401	232	140	77	35	14	0.4
5	1109	922	625	392	232	132	62	29	0.9
6	2531	2009	1105	611	372	203	96	42	2.1
8	4812	3555	1901	1211	726	401	191	65	3.2
10	7498	6183	3740	2065	1232	695	321	151	3.9
12	9928	8805	5905	3178	1909	1065	495	234	5
14	12915	10854	7220	4560	2771	1554	712	338	5.8
16	16626	14961	9909	6289	3780	2133	980	460	8
18	23705	19743	13178	8325	5029	2822	1301	613	10
20	27915	25396	16928	10698	6468	3623	1678	790	12
24	43212	39206	26128	16550	9807	5567	2521	860	21

The valve sizing coefficient is referred to as "Cv" and is the rate of water flow in gallons per minute (GPM) through a given opening at a pressure drop (ΔP) of 1 PSI at standard room temperature. The recommended angle of opening for valve sizing is between 50° and 70° open.











Weights

Size		Wafer Weight		Lug Weight		Individual Handle		Individual Gear Operator	
in	mm	lbs	kg	lbs	kg	lbs	kg	lbs	kg
2	DN50	6.0	2.7	10.4	4.7	2.4	1.0	2.8	1.3
2½	DN65	7.5	3.4	11.2	5.1	2.4	1.0	2.8	1.3
3	DN75	8.4	3.8	19.0	8.6	2.4	.9	2.8	1.3
4	DN100	11.5	5.2	21.6	9.8	2.6	.9	2.8	1.3
5	DN125	16.1	7.3	28.4	12.9	2.9	.9	5.6	2.5
6	DN150	18.3	8.3	31.3	14.2	2.9	.9	5.6	2.5
8	DN200	30.4	13.8	45.6	20.7	5.7	2.5	11.5	5.2
10	DN250	44.1	20.0	69.4	31.5	5.7	2.5	11.5	5.2
12	DN300	75.4	34.2	115.3	52.3	5.7	2.5	22.2	10.1
14	DN350	99.0	44.9	170.4	77.3	—	—	22.2	10.1
16	DN400	121.3	55.0	213.2	96.7	—	—	40.8	18.5
18	DN450	202.8	92.0	262.8	119.2	—	—	40.8	18.5
20	DN500	—	—	—	—	—	—	78.1	35.4
24	DN600	—	—	—	—	—	—	101	45.8



D & S Series Butterfly Valves

Seat Material Guide


	Seat Material (Backing Material)	Code	NSF	General Application	Temperature Range at Full Rated Pressure	NOT Recommended For
	EPDM (Phenolic)	EPDM	NSF 61	H ₂ O, Air, Brine, Abrasives, Phosphates, Esters Ketones, Alkali, Food Compounds, Liquids and Solids, Dilute Inorganic Acids, Caustic Soda	-40°F to 275°F (-40°C to 135°C)	Hydrocarbons, Oils, Fats, Dry Air
	White EPDM Food Grade (Phenolic)	WEF	NSF 61		-40°F to 212°F (-40°C to 100°C)	
	Black EPDM Food Grade (Phenolic)	BEF	NSF 61		-40°F to 230°F (-40°C to 110°C)	
	High Temp EPDM (Phenolic)	HT- EPDM	NSF 61	Standard EPDM + Low Pressure Saturated Steam	-4°F to 302°F (-20°C to 150°C)	
	Wear Resistant EPDM (Phenolic)	WR- EPDM	NSF 61	Standard EPDM + Abrasive Products	14°F to 250°F (-40°C to 121°C)	
	BUNA-N (NBR) (Phenolic)	BUNA	NSF 61	Hydrocarbons with less than 40% of aromatics, Natural Gas, Air, H ₂ O, Sea Water, Brine, Alcohols, Glycols	10°F to 180°F (-12°C to 82°C)	Solvents, Benzene, Xylene
	White BUNA Food Grade (Phenolic)	WBF	NSF 61		-30°F to 230°F (-30°C to 110°C)	
	High Temp BUNA (Hydrogenated NBR) (Phenolic)	HT- BUNA	NSF 61		-30°F to 330°F (-34°C to 165°C)	
	VITON (FKM) (Aluminum)	VITON	NSF 372	Hydrocarbons with high concentration of aromatics, Mineral and Halogenated Acids, Phosphoric Acid, Aliphatic and Aromatic Ethers	0°F to 300°F (-18°C to 149°C)	Steam, Ketones, Amines, Esters, Alkali
	PTFE over EPDM (Phenolic)	PTFE/E	NSF 61	Corrosive Products - Solvents	-4°F to 275°F (-20°C to 135°C)	Abrasive products, Fluorine Gases, Alkaline Metals
	PTFE over VITON (Aluminum)	PTFE/V	NSF 61		-4°F to 300°F (-20°C to 149°C)	

*Material guidelines for reference only. Actual suitability can depend on a combination of temperature, pressure, chemical concentration and other variables.




Seat Material (Backing Material)	Code	NSF	General Application	Temperature Range at Full Rated Pressure	NOT Recommended For
<i>Natural Rubber (Phenolic)</i>	NR	NSF 61	Abrasive Products	-55°F to 210°F (-48°C to 99°C)	Strong Acids and Bases, Hydrocarbons, Elevate Temperature Applications
<i>Silicone (Phenolic)</i>	SIL	NSF 61	Beverages, Food	-40°F to 400°F (-40°C to 204°C)	Hydrocarbons, Solvents, Steam
<i>Chlorosulfonated Synthetic Rubber (Phenolic)</i>	CSM	NSF 61	Oxidizing Acids, Chromic Acid, Hydrofluoric Acid, Sulphur Based Acids, Sodium Hypoclonite, ozone	0°F to 275°F (-18°C to 135°C)	Steam, Ketones, Hot Air, Nitric Acid
<i>Neoprene (Phenolic)</i>	NP	NSF 61	Oils, Dilute Mineral Acids, Alkali, Fats	20°F to 200°F (-7°C to 93°C)	Ketones, Concentrated Acids, Solvents for Paint

Booted

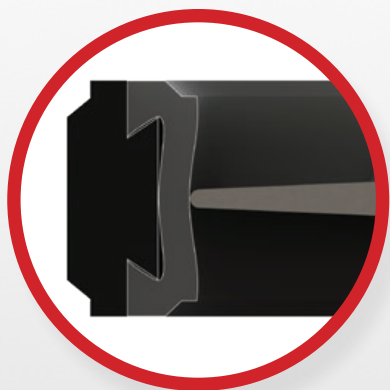

*Booted seat bulging
around disc contact
points*


Molded

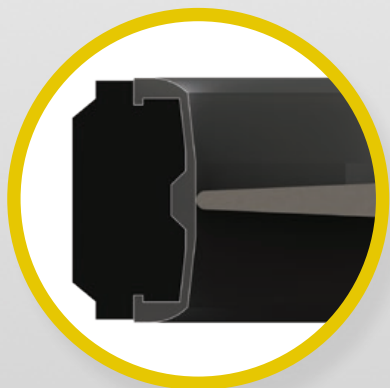

*Molded seat
permanently bonded
to valve body*

Superior Cartridge Seat Design
Why a Cartridge Seat Is the Preferred Choice:

Cartridge

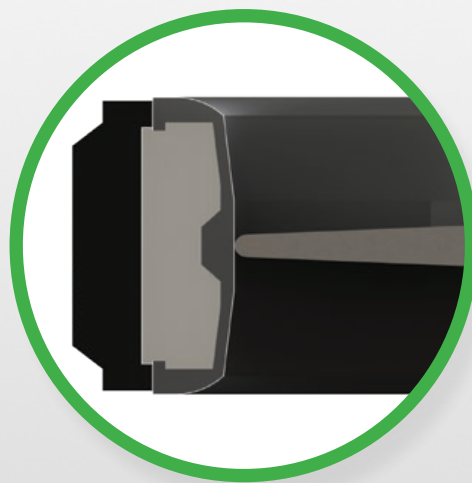

*Cartridge seat
with rigid phenolic
backing ring*

Feature	Cartridge Seat	Molded Seat	Booted Seat
Replaceable	YES	NO	YES
Ideal for Vacuum Service	YES	YES	NO
Dead End Service Capable	YES	YES	NO
Deformation Resistant	YES	YES	NO
Flange Type Independent	YES	YES	NO

D & S Series Butterfly Valves

Disc Material Guide



NSF372 ONLY

DI-NP

Nickel Plated Ductile Iron

Ductile iron disc for strength, coated with Nickel Plating for corrosion resistance and increased abrasion resistance.

Recommended Applications:

Air, Kerosene, Oils, Ketones, Hydrocarbons, Solvents, Detergents, Salts, Concentrated Organic Acids

Not Recommended For:

Inorganic Acids, Diluted Organic Acids



NSF61

AL-BZ

Aluminum Bronze

Strength similar to carbon steel, but with an aluminum oxide layer on the surface for excellent corrosion resistance.

Recommended Applications:

Sea Water, Brine, Detergents, Gasoline, Alcohols, Esters, Ketones, Potable Water

Not Recommended For:

Acids



NSF61

CF8M

316 Stainless Steel


Stainless steel disc is inherently strong for industrial use and corrosion resistant for a wide range of chemical and environmental applications.

Recommended Applications:

Acetic Acids, Air, Automotive Oils & Fuels, Beer, Freon, Gasoline, Ketones, Oils, Oxygen, Steam, Sea Water, Potable Water

Not Recommended For:

Acids

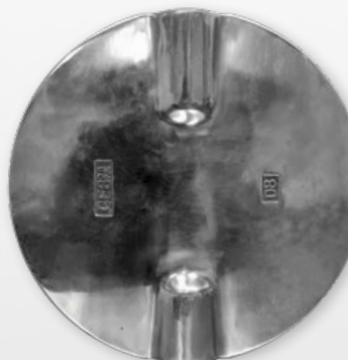

NSF61

Polished

Polished 316 Stainless Steel


All the benefits of stainless steel strength and corrosion resistance, plus a highly polished surface for sanitary applications.

Recommended Applications:

Sanitary Applications, Potable Water

Not Recommended For:

Acids

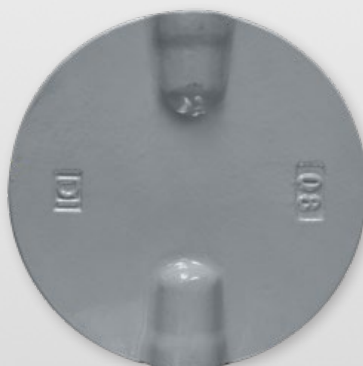

NSF61

NY11

Nylon 11 Coated Ductile Iron

Ductile iron disc for strength, coated with Nylon 11 for corrosion resistance and excellent abrasion resistance.

Recommended Applications:

Inorganic Salts, Alkalis, Most Solvents, Most Organic Acids, Hydrocarbons, Oils, Kerosene, Ketones, Esters, Detergents, Sea Water, Abrasives

Not Recommended For:

Inorganic Acids, Phenols, Chlorinated Solvents



NSF61

PTFE

PTFE Coated 316 Stainless Steel


Recommended Applications:

Acids, Alcohols, Solvents, Oils, Potable Water

Not Recommended For:

Fluorine

*Material guidelines for reference only. Actual suitability can depend on a combination of temperature, pressure, chemical concentration and other variables.

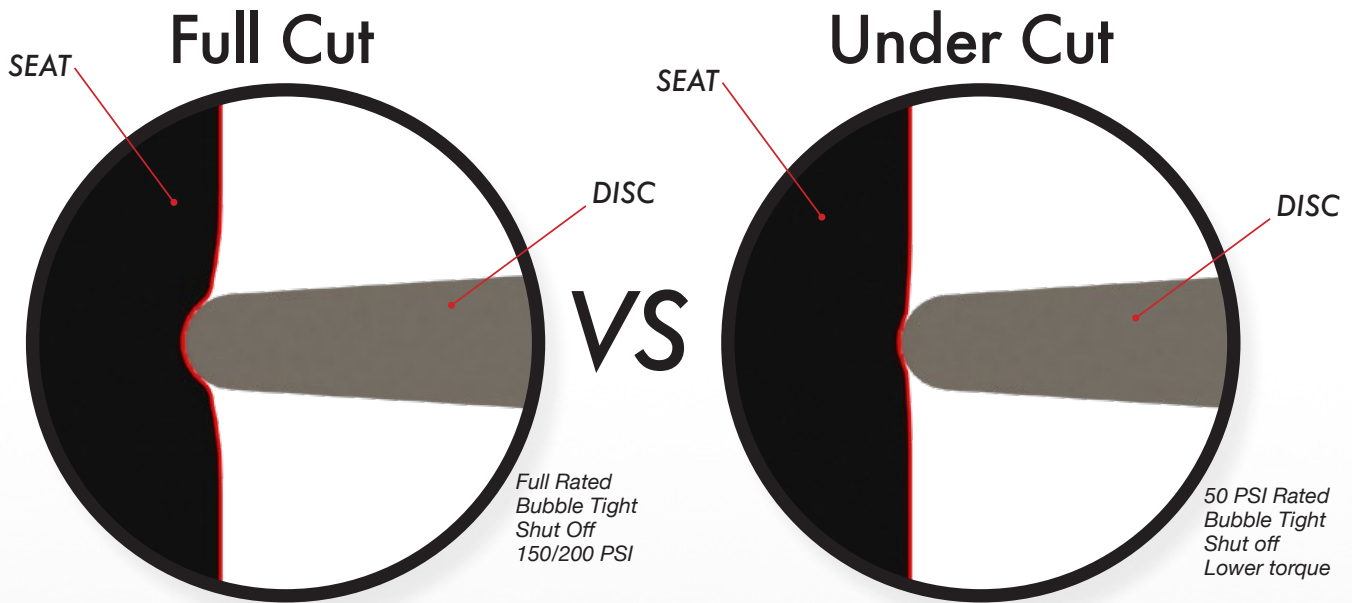

Why Full Cut?

Full cut discs provide bubble tight shut off at 150/200 PSI for a wide variety of applications, such as liquid or gas media.

Why Under Cut?

Under cut discs require less torque to operate but are only rated to 50 PSI bubble tight shutoff. common applications are solids dispensing or conveying, or any low pressure process.

Valve & Disc Treatment Options



Passivation

Why passivation treatment?

Passivation is a process by which the inherent corrosion resistance of stainless steel is maximized through a two step process of cleaning and subsequent immersion in an acid bath thereby creating a uniform oxidation layer that optimizes the corrosion resistance.

What's treated?

Disc only



Silicone Free

Why silicone free treatment?

Silicone Free cleaning is conducted on valves in order to prevent silicone contamination within processes (such as automotive painting) that are sensitive to silicone. The valves are subsequently sealed within polyethylene bags to prevent recontamination prior to installation.

What's treated?

Total Valve



Oxygen Clean

Why oxygen clean treatment?

Oxygen cleaning is conducted on valves to prevent the potentially violent oxidation (fire or explosion) of contaminants (most often hydrocarbons) on the surfaces exposed to oxygen within a process. The valves are subsequently sealed within polyethylene bags to prevent recontamination prior to installation.

What's treated?

Total Valve

Slim Disc Design

What is the advantage of the Slim Disc design?

MA Stewart and Sons' slim disc design minimizes the disc profile to maximize flow. This is especially important for smaller butterfly valves where the disc takes up proportionally more of the flow path. Slim disc design is standard up to 12" sizes.

Standard
Disc Design
14" and up






Slim Disc
High Cv
Design
Up to 12"






D & S Series Butterfly Valves




Chemical Compatibility Chart

Legend	
Excellent	
Good	
Unsatisfactory	
Not Tested (blank)	

Material	316 SS	416 SS	EPDM	ALUMINUM BRONZE	NICKEL PLATED D.I.	BUNA-N	VITON	TEFLON
316 SS	●	●	●	●	●	●	●	●
416 SS	●	●	●	●	●	●	●	●
EPDM	●	●	●	●	●	●	●	●
ALUMINUM BRONZE	●	●	●	●	●	●	●	●
NICKEL PLATED D.I.	●	●	●	●	●	●	●	●
BUNA-N	●	●	●	●	●	●	●	●
VITON	●	●	●	●	●	●	●	●
TEFLON	●	●	●	●	●	●	●	●

Legend	
Excellent	
Good	
Unsatisfactory	
Not Tested (blank)	


[illegible]

Legend	
Excellent	
Good	
Unsatisfactory	
Not Tested (blank)	

[illegible]

M.A. Stewart & Sons has provided the above chemical compatibility information as a convenience to our customer partners. This information is compiled from a number of reputable sources and is ONLY intended to provide very general material selection guidance. M.A. Stewart & Sons will assume no liability from its use as there are a multitude of variations in application details. Factors such as pressure, temperature, chemical concentrations and the like play very critical factors in material compatibility. All of them cannot be considered here. In critical applications, materials experts should be consulted or testing should be conducted in order to determine proper materials selection, particularly where dangerous and/or toxic materials are a factor. M.A. Stewart & Sons does not provide any express or implied warranty regarding this information.

Crossover Guide

Body	Ductile Iron						Valve Type
Disc	Ductile Iron-Nickel Plated		Aluminum-Bronze		316 Stainless Steel		
Seat	EPDM	BUNA	EPDM	BUNA	EPDM	BUNA	
	W-D-4-DI-E	W-D-4-DI-B	W-D-4-A-E	W-D-4-A-B	W-D-4-S-E	W-D-4-S-B	Wafer
	L-D-4-DI-E	L-D-4-DI-B	L-D-4-A-E	L-D-4-A-B	L-D-4-S-E	L-D-4-S-B	Lug
Bray	30-11010-119	30-11010-713	30-11010-120	30-11010-684	30-11010-124	30-11010-125	Wafer
	31-11010-119	31-11010-713	31-11010-120	31-11010-684	31-11010-124	31-11010-125	Lug
Centerline	A2-021-05	A2-021-01	A2-061-05	A2-061-01	A2-044-05	A2-044-01	Wafer
	B2-021-05	B2-021-01	B2-061-05	B2-061-01	B2-044-05	B2-044-01	Lug
Demco	NE-C111535_ NE-C511535_	NE-C111531_ NE-C511531_	NE-C111435_ NE-C511435_	NE-C111431_ NE-C511431_	NE-C112235_ NE-C512235_	NE-C112231_ NE-C512231_	Wafer Lug
	WD-820_-3 LD-820_-3	WD-810_-3 LD-810_-3	WD-828_-3 LD-828_-3	WD-818_-3 LD-818_-3	WD-827_-4 LD-827_-4	WD-817_-4 LD-817_-4	Wafer Lug
Keystone	AR1-323 AR2-323	AR1-285 AR2-285	AR1-061 AR2-061	AR1-064 AR2-064	AR1-805 AR2-805	AR1-723 AR2-723	Wafer Lug
	5112E 6112E	5112B 6112B	5122E 6122E	5122B 6122B	5141E 6141E	5141B 6141B	Wafer Lug
Mueller Steam	SERIES 51 SERIES 52	SERIES 51 SERIES 52	87-INB6 88-INB6	87-INB3 88-INB3	87-INH6 88-INH6	87-INH3 88-INH3	Wafer Lug
	WD-2010 LD-2010	WD-2110 LD-2110	WD-2000 LD-2000	WD-2100 LD-2100	WD-3022 LD-3022	WD-3122 LD-3122	Wafer Lug




Accessories

Handles, Gear Operators, Lockout Devices

Handles & Throttle Plates

M.A. Stewart & Sons butterfly valves can be readily equipped with lever handles for easy manual operation, which come standard with a 10 position notch plate for quick open/close and throttling. Ductile iron valves are available with malleable iron handles and standard plated carbon steel notch plate. Stainless steel valves are available with 304 SS handles and matching 304 SS notch plates. Lever handles and notch plates are available up through 12" sizes. See pages 9 & 19 for more handle details.

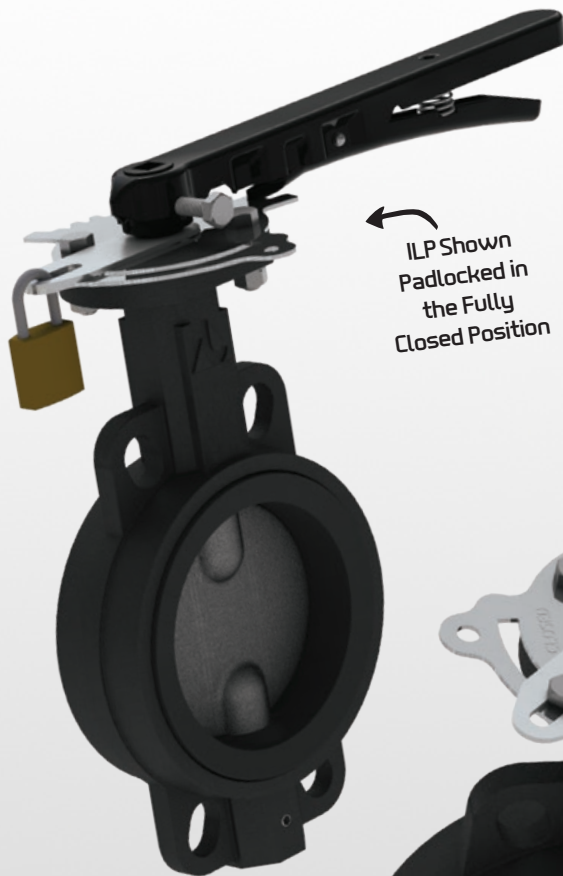

ILP Shown
Padlocked in
the Fully
Closed Position



ILP Shown
Bolted in an
Intermediate
Position


Infinite Locking Plates & Arms

For more adjustable throttling and lockout capability on lever handle operated valves, M.A. Stewart & Sons "ILP" series infinite locking plates are designed to directly replace the standard notch plates. ILP kits come with a 304 SS base plate and arm to allow throttling positions at any angle and lockout at full open or closed. M.A. Stewart & Sons infinite locking plates can be used on either ductile iron or stainless steel butterfly valves up through 12" sizes. See pages 8 & 18 for more details.

Manual Gear Operators

All butterfly valve sizes can be outfitted with a manual gear operator for low-torque operation. M.A. Stewart & Sons' GO Series gear operators are made to direct mount to keep a low profile and simplify installation. Epoxy coated ductile iron housings and malleable iron hand wheels make these gear operators very robust for industrial applications. Chain wheels can be furnished upon request. See pages 9 & 19 for more details.

*Watertight/Submersible gear operators available call for details

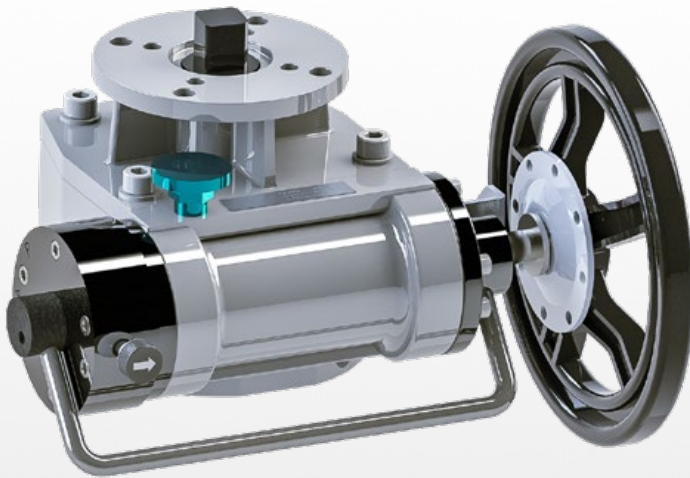

Declutch-able Gear Operators

For automated butterfly valves, declutch-able sandwich style gear operators allow for hand wheel operated manual override for maintenance or emergency situations. GOW series declutch-able gear operators direct mount to ISO 5211 standard actuators and to all M.A. Stewart & Sons butterfly valves. Contact factory for more details.

Lockout Devices


All M.A. Stewart & Sons butterfly valves can be equipped with lockout devices, either handle operated or gear operated. Lockout kits come in plated carbon steel or 304 SS. Contact factory for more details.



Installation Guidelines

Please Contact Factory for Full
Installation and Operation Manual

Figure 1

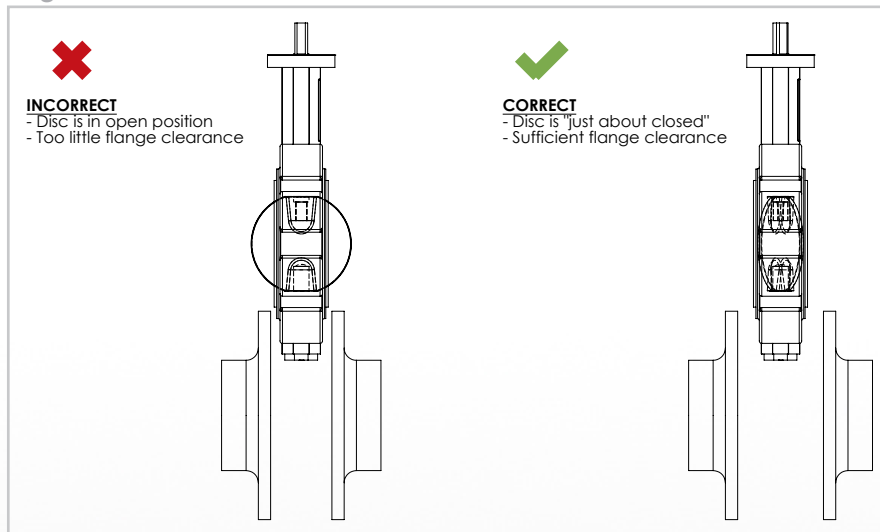

Bolting Requirements:

The required bolting information is listed on page 61 (see Table 1), and is designed to provide information regarding size, type, and quantity of bolting recommended for installation of the MA Stewart & Sons Series resilient seated butterfly valves. All recommendations are in accordance with ASME 125/150 specifications. Please note flange bolting is not included with shipment of any valve.



NOTE: For schedule 10 and/or thin wall pipe, extra care must be taken to align seat on flange face to avoid valve damage.

Pre-installation Checklist:

1. Remove any protective flange covers from the valve
2. Inspect the valve to ensure the flow path is free from dirt and debris
3. Be careful that the mating pipeline is also free from dirt and debris, such as rust, pipe scale, welding slag and debris, which can easily damage the seat and disc surfaces
4. Any operators, either manual or automated, should be installed PRIOR to installation, to ensure proper alignment of all connecting hardware, and also proper alignment of the disc and valve seat
5. Double check the valve identification tag to ensure that the valve materials meet the intended operating conditions. It is always critically important to double check all factors during the installation process

Valve Alignment and Flanging:

Do not install flange gaskets – the butterfly valve seat is designed to mate directly to the flange and provides the seal. Leave the disc in the "just about closed" position and center the disc with the pipeline (See Figure 3 on the right). The next step is to insert all necessary bolts to attach the valve to the flanges, which varies depending on wafer or lug style.

For wafer style valves, loosely install the four bolts that pass through the upper and lower body alignment holes as shown in Figure 4 on the right. Next, insert the remaining flange bolts until all bolts are in position, then hand tighten all bolts. For lug valves, loosely install all bolts between the flanges and the lugs and hand tighten when complete if using style C as shown in Figure 4. If using lug style B, first insert threaded studs, then hand tighten the nuts on each side.

Before tightening the bolts, the valve needs to be positioned so that disc movement is free and unobstructed. Carefully open the disc to the fully open position and verify that there is no interference between the disc and the flanges. In addition, ensure that the flanges are properly aligned during tightening to minimize uneven stress or damage on the valve body or seat (See Figure 5 on the right). It is recommended to follow the Bolt Tightening Procedure on the next page.

WARNING: PERSONAL INJURY OR PROPERTY DAMAGE MAY RESULT IF THE VALVE IS INSTALLED WHERE SERVICE CONDITIONS EXCEED VALVE RATINGS. PLEASE TAKE SPECIAL CARE TO DOUBLE CHECK ALL FACTORS DURING THE INSTALLATION PROCESS.

Initial Valve Positioning:

Before valve installation, it is important to properly align the mating pipe flanges. To install the valve, create enough space between the two flanges so that the valve body will fit without contact and carefully move the valve into position. Make sure the valve disc is in the "just about closed" position before insertion (See Figure 2 on the right).

Figure 2


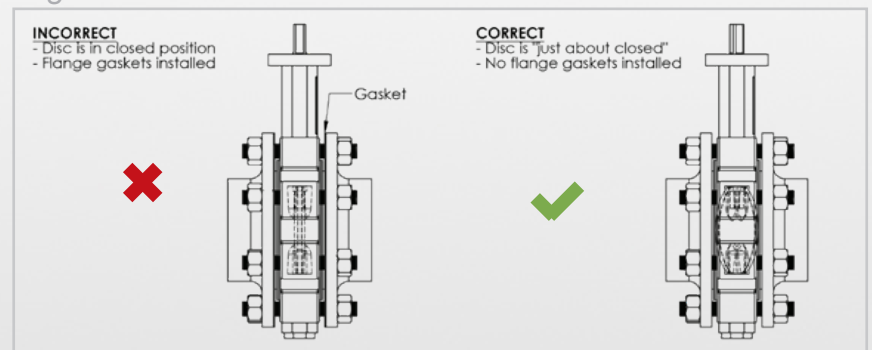


Figure 3



Figure 4

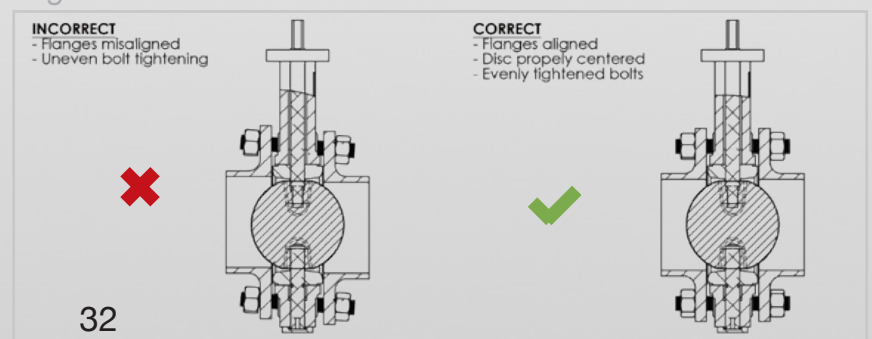


Bolt Tightening Sequence:

For lugged style valves (particularly important for PTFE seated valves), it is essential to tighten the flange bolting uniformly on both sides of the valve to assure that the cartridge seat is not forced out of position. Improper tightening can result in leakage through the stem seals. The proper tightening procedure is as follows (See Figure 6 on the right):

1. If using a long stud and nuts as in style "B", after positioning the valve between the mating flanges, install the nuts in all positions to hand tight or just until they contact the flange face only. If using bolts as in style "C", tighten the bolts on both sides of the valve until they are hand tight or just contacting the flange face.

2. The nuts or bolts immediately on either side of the upper stem (position 1 & 2) should be tightened first. Start with position 1 and tighten bolts/nuts in ½ turn increments, alternating between the front and back flanges.
3. Once that position is tight, proceed to tighten the bolt/nut pair opposite from the pair that was just tightened and tighten in the same fashion (position 2).
4. Follow the same sequence as in steps 2 and 3 above on the opposite end of the valve near the lower stem (positions 3 & 4).
5. Tighten the remaining bolts (if any) in a star pattern around the valve and then re-check all bolts/nuts for tightness in a star pattern for all bolts/nuts (position 5, 6, 7, 8, etc). Make sure to alternate sides and tighten in 1/2 turn increments.

Figure 5

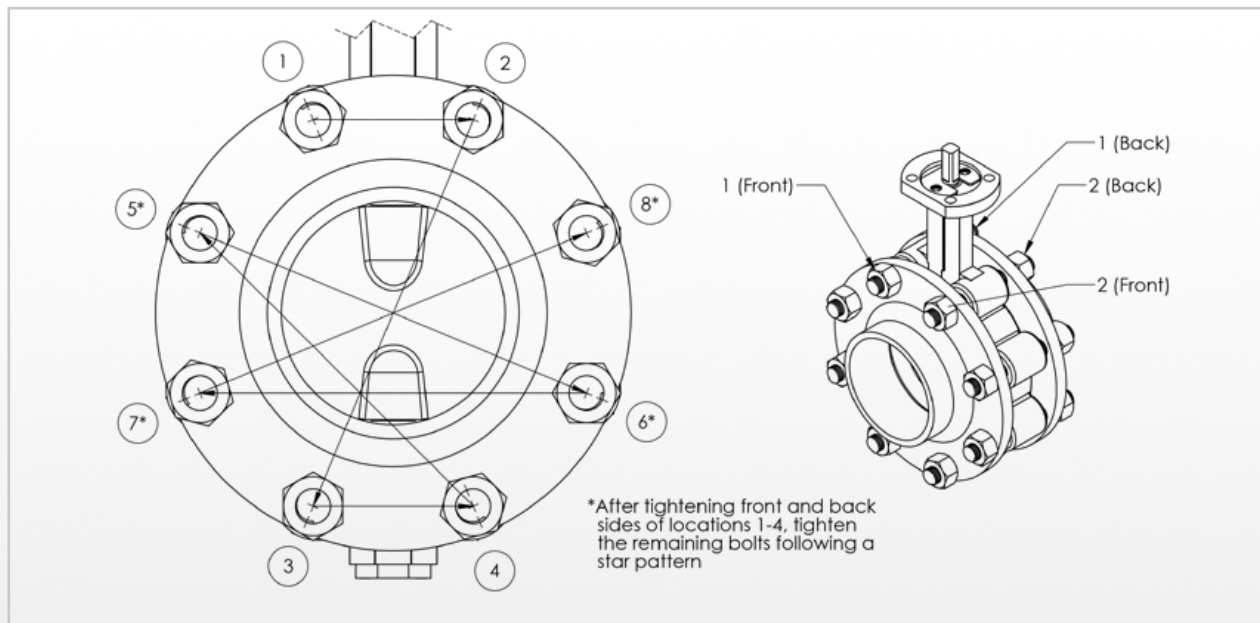

Flange Bolting Requirements:

Table 1

Valve Size	Diameter	Machine & Stud #	Cap Screw #	Bolt Length A	Stud Length B	Cap Screw Length C	Thread Size	Recommended Torque in-lbs
1.5"	0.500	4	8	3.25	3.75	1.25	1/2"-13UNC	25-30
2"	0.625	4	8	4.00	5.00	1.25	5/8"-11UNC	30-35
2.5"	0.625	4	8	4.25	5.25	1.50	5/8"-11UNC	30-35
3"	0.625	4	8	4.50	5.25	1.50	5/8"-11UNC	35-40
4"	0.625	8	16	5.00	6.00	1.75	5/8"-11UNC	35-40
5"	0.750	8	16	5.50	6.50	1.75	3/4"-10-UNC	35-50
6"	0.750	8	16	5.50	6.75	2.00	3/4"-10UNC	35-65
8"	0.750	8	16	6.00	7.00	2.25	3/4"-10UNC	45-80
10"	0.875	12	24	6.75	8.00	2.25	7/8"-9UNC	55-100
12"	0.875	12	24	7.00	8.25	2.50	7/8"-9UNC	65-120
16"	1.000	16	32	8.00	9.00	3.25	1"-8UNC	75-140
18"	1.125	16	32	8.75	10.00	3.50	1-1/8"-7UNC	85-170
20"	1.125	20	40	9.50	10.75	3.75	1-1/8"-7UNC	85-180
24"	1.250	20	40	10.25	12.50	4.50	1-1/4"-7UNC	100-220



NOTE: These torque values are a general recommendation ONLY for minimum tightening torques. Many factors affect tightening requirements including bolt grade, pipe alignment, flange material and others. Field engineering personnel must make final torque value decisions. Call factory for flange bolting requirements up to 48" size.



CE Marking

is a mandatory conformity marking for certain products sold within the European Economic Area (EEA) since 1985. The CE marking is also found on products sold outside the EEA that are manufactured in, or designed to be sold in, the EEA. This makes the CE marking recognizable worldwide even to people who are not familiar with the European Economic Area. It is in that sense similar to the FCC Declaration of Conformity used on certain electronic devices sold in the United States.

The CE marking is the manufacturer's declaration that the product meets the requirements of the applicable EC directives.



ISO 5211:

This standard defines a standardized interface system between industrial valves and the part turn actuators used operate them. It details the dimensional requirements for both the mounting flanges on both devices as well as the driving and driven components. This standardization simplifies the design of or eliminates the need for interface components between part turn valves and actuators.



NSF/ANSI 372

NSF/ANSI 372

is essentially equivalent to Annex G of NSF/ANSI Standard 61 and assures that the materials used in the water contact components of a water system component do not exceed 0.25% lead content. Some trims excluded. See pg. 4-5



The Canadian Registration Number

is a number issued by each province or territory of Canada to the design of a boiler, pressure vessel or fitting. The CRN identifies the design has been accepted and registered for use in that province or territory.



NSF/ANSI 61

NSF/ANSI Standard 61

NSF/ANSI 61 sets health effects criteria for many water system components including:

- Protective barrier materials (cements, paints, coatings)
- Joining and sealing materials (gaskets, adhesives, lubricants)
- Mechanical devices (water meters, valves, filters)
- Pipes and related products (pipe, hose, fittings)
- Plumbing devices (faucets, drinking fountains)
- Process media (filter media, ion exchange resins)
- Non-metallic potable water materials

As it relates to valves specifically, it assures that the materials in contact with the flow stream do not introduce toxins into the water in amounts that exceed allowable exposure limits. Some trims excluded. See pg. 4-5



API 609

API standard covering the design, materials, face-to-face dimensions, pressure-temperature ratings, and examination, inspection and test requirements for gray iron, ductile iron, bronze, steel, nickel-based alloy, or special alloy butterfly valves.



MSS SP-67

Industry standard covering the dimensions, design, testing, and marking requirements for butterfly valves.

3-Year Limited Warranty

M.A. Stewart & Sons Ltd., hereinafter referred to as “MAS”, provides the following limited 3 year manufacturer’s warranty regarding all quarter turn valve products manufactured by MAS. This warranty includes all valves which are manufactured by MAS and only applies to those items which are clearly identified as M.A. Stewart & Sons brand labeled products. The warranty stated herein is expressly in lieu of all other warranties and representations, expressed or implied, or statutory, including, without limitation, the implied warranty of fitness for a particular purpose.

MAS warrants its products to be free from defects in materials and workmanship when these products are used for the purpose for which they were designed and manufactured. MAS does not warrant its products against chemical or stress corrosion or against any other failure other than from defects in materials or workmanship. The warranty period is for thirty-six months from the delivery date by MAS to its customers. Any claims regarding this warranty must be in writing and received by MAS before the last effective date of the warranty period.

Upon receipt of a warranty claim, MAS reserves the right to inspect the product(s) in question at either the field location or at a MAS designated facility. If, after the inspection of the product(s) in question, MAS determines that the purchaser’s claim is covered by this warranty, MAS’ sole liability and the purchaser’s sole remedy under this warranty is limited to the refunding of the purchase price or repair or replacement thereof, at the sole discretion of MAS.

MAS will not be liable for any repairs, labor, material, or other expenses that are not specifically authorized in writing by MAS, and in no event shall MAS be liable for any direct or consequential damages arising out of any defect from any cause whatsoever. If any MAS products are modified or altered in any way, without the expressed written consent of MAS, the products will not be covered by this warranty.

MAS shall not be liable for any incidental, consequential or other damages, costs, or economic losses, including, without limitation, any resulting from labor charges, delays, vandalism, negligence, fouling caused by foreign material damage from adverse flow conditions, chemicals, or acts of God, or circumstances that are not controllable or reasonably foreseeable by MAS.

This warranty shall be invalidated in all circumstances where MAS, acting reasonably, determines that the product(s) was subject to abuse, misuse, neglect, or improper application, installation, alteration or modification not authorized in writing by MAS. All claims received by MAS beyond the warranty period are invalid and shall not be accepted.

Except for the express written warranty contained herein, MAS does not make any other warranty, condition, guarantee, or indemnity, express or implied, statutory or otherwise, regarding the products including without limitation, to the extent permitted by law, any warranty or merchantability or fitness for a particular purpose. All other warranties, conditions guarantees and indemnities regarding any products are hereby disclaimed, excluded and overwritten.



Head Office

12900-87th Avenue
Surrey, British Columbia
Canada V3W 3H9
mail to: P.O. 258, Surrey, BC, V3T 4W8
Phone: (604) 594-8431
Toll Free North America: 1-800-594-8431
Fax: (604) 594-4335

Ontario Branch

40 Pugsley Court,
Ajax, Ontario L1Z 0L8
Phone: (905) 683-7303
Fax: (905) 683-9108

Alberta Branch

3006 - 51 Avenue, Unit #4
Edmonton, Alberta T6P 0E1
Phone: (780) 436-9051
Fax: (780) 435-0463
Toll Free in Alberta 1-800-232-7376

Quebec Branch

79H Brunswick Blvd.
Dollard-des-Ormeaux, Que. H9B 2J5
Phone: (514) 421-6311
Fax: (514) 421-6323

Sales Offices

Calgary, Alberta
Phone: (403) 252-7262
Fax: (403) 253-8455

Winnipeg, Manitoba
Phone: (204) 837-5604
Fax: (204) 896-1992

Dartmouth, Nova Scotia
Phone: (905) 683-7303
Fax: (905) 683-9108



USA Head Office

803 Pressley Road, Suite 105
Charlotte, North Carolina, 28217
Phone: (704) 527-0722
Toll Free: 1-866-582-5837
Fax: (704) 527-0791
Toll Free: 1-866-810-9287



B.K. THORPE COMPANY

A MEMBER OF THE M.A. STEWART GROUP 

Long Beach Branch

1811 E. 28th Street
Signal Hill, CA 90755
Phone: (562) 595-1811
Toll Free: 1-888-337-7598
Fax: (562) 426-6016

Bakersfield Branch

5225 Gilmore Ave.
Bakersfield, CA 93308-6302
Phone: (661) 322-1935
Toll Free: 1-877-258-6166
Fax: (661) 322-6719

Reliable Pipe Supply Co. Inc

1430 National Avenue,
P.O. Box 120522
San Diego, CA 92112-0522
Phone: (619) 233-0118
Fax: (619) 544-0162

www.bkthorpe.com

www.mastewartusa.com